

MEMBER  
**ABYC**  
Setting Standards for Safer Boating

21

ISO 9001

*BayStar*<sup>TM</sup>

*Capitano*<sup>TM</sup>

*SeaStar*<sup>®</sup>

**Teleflex**<sup>®</sup>  
MARINE

MANUFACTURED BY  
TELEFLEX CANADA LIMITED  
PARTNERSHIP

# INSTALLATION INSTRUCTIONS

## AND OWNER'S MANUAL

[www.seastarsteering.com](http://www.seastarsteering.com)




*SeaStar*<sup>®</sup>

Steering Cylinder Installation Manual  
for Hydraulic Inboard and Sterndrive  
Powered Vessels






*Before you do it your way,  
please try it our way*

# Notice to Boat Manufacturer or Installer

Throughout this publication, Warnings and Cautions (accompanied by the International Hazard Symbol ) are used to alert the manufacturer or installer to special instructions concerning a particular service or operation that may be hazardous if performed incorrectly or carelessly.

## Observe Them Carefully!

These “safety alerts” alone, cannot eliminate the hazards that they signal. Strict compliance to these special instructions when performing the installation and maintenance plus “common sense” operation are major accident prevention measures.

 DANGER	 WARNING	 CAUTION	NOTICE
Immediate hazards which <b>WILL</b> result in severe personal injury or death.	Hazards or unsafe practices which <b>COULD</b> result in severe personal injury or death.	Hazards or unsafe practices which <b>COULD</b> result in minor injury or product or property damage.	Information which is important to proper installation or maintenance, but is not hazard-related.

## WARNING

**Cleaning fluids containing ammonia, acids or any other corrosive ingredients must not be used for cleaning any part of this Hydraulic Steering System. Failure to comply will cause serious damage to the steering system, resulting in possible loss of steering, causing property damage, personal injury and/or death.**

## ***Don't compromise performance... use genuine SeaStar parts only!***

- SeaStar Helms
- SeaStar Hoses
- SeaStar Cylinders
- SeaStar Oil

Substituting non SeaStar parts in any part of the SeaStar hydraulic steering system, may seriously compromise system performance.

# INTRODUCTION

Before proceeding with the installation, read THESE instructions and ALL other instructions included with the rest of your system (helm pumps, Power Assist etc). Teleflex Marine cannot accept responsibility for installations where instructions have not been followed, where substitute parts have been used, or modifications have been made to our products. Warranty may be void if products other than Teleflex products are used within the system.

## NOTICE

*Due to a small amount of internal slip, a “Master Spoke” or “centered” steering wheel cannot be maintained with a hydraulic steering system. For best results, us an equal distance spoke steering wheel.*

## WARNING

**DO NOT use a wire coil type trim switch with a hydraulic steering system. Wire coil can wind up tight around the steering wheel preventing further steering.**

## Index

Introduction .....	i
System Overview Diagram.....	ii
Tools .....	1
Things You Need to Know .....	2
System Installation Overview.....	3
Cylinder Mounting: All Inboard ATM & TM/TMC Models .....	4
Cylinder Mounting: Sterndrive Engine Mount Cylinders .....	9
Hose and Tubing Installations .....	14
Additional Stations, Autopilots & SeaStar Power Assist Units .....	18
Manual Filling and Purging .....	19
Oil Level & System Check .....	24
Routine Maintenance .....	25
Troubleshooting Guide .....	26
Technical Information .....	29
Parts List.....	30
Statement of Limited Warranty .....	39
Return Goods Procedure .....	39

The following steering cylinders are covered within this manual.  
HC1503-3, HC5303-3, HC5312-3, HC5313-3, HC5314-3, HC5322-3,  
HC5323-3, HC5326-3, HC5328-3, HC5329-3, HC5330-3, HC5331-3,  
HC5332-3, HC5339-3 and HC6324-3.

# Typical Inboard Steering System

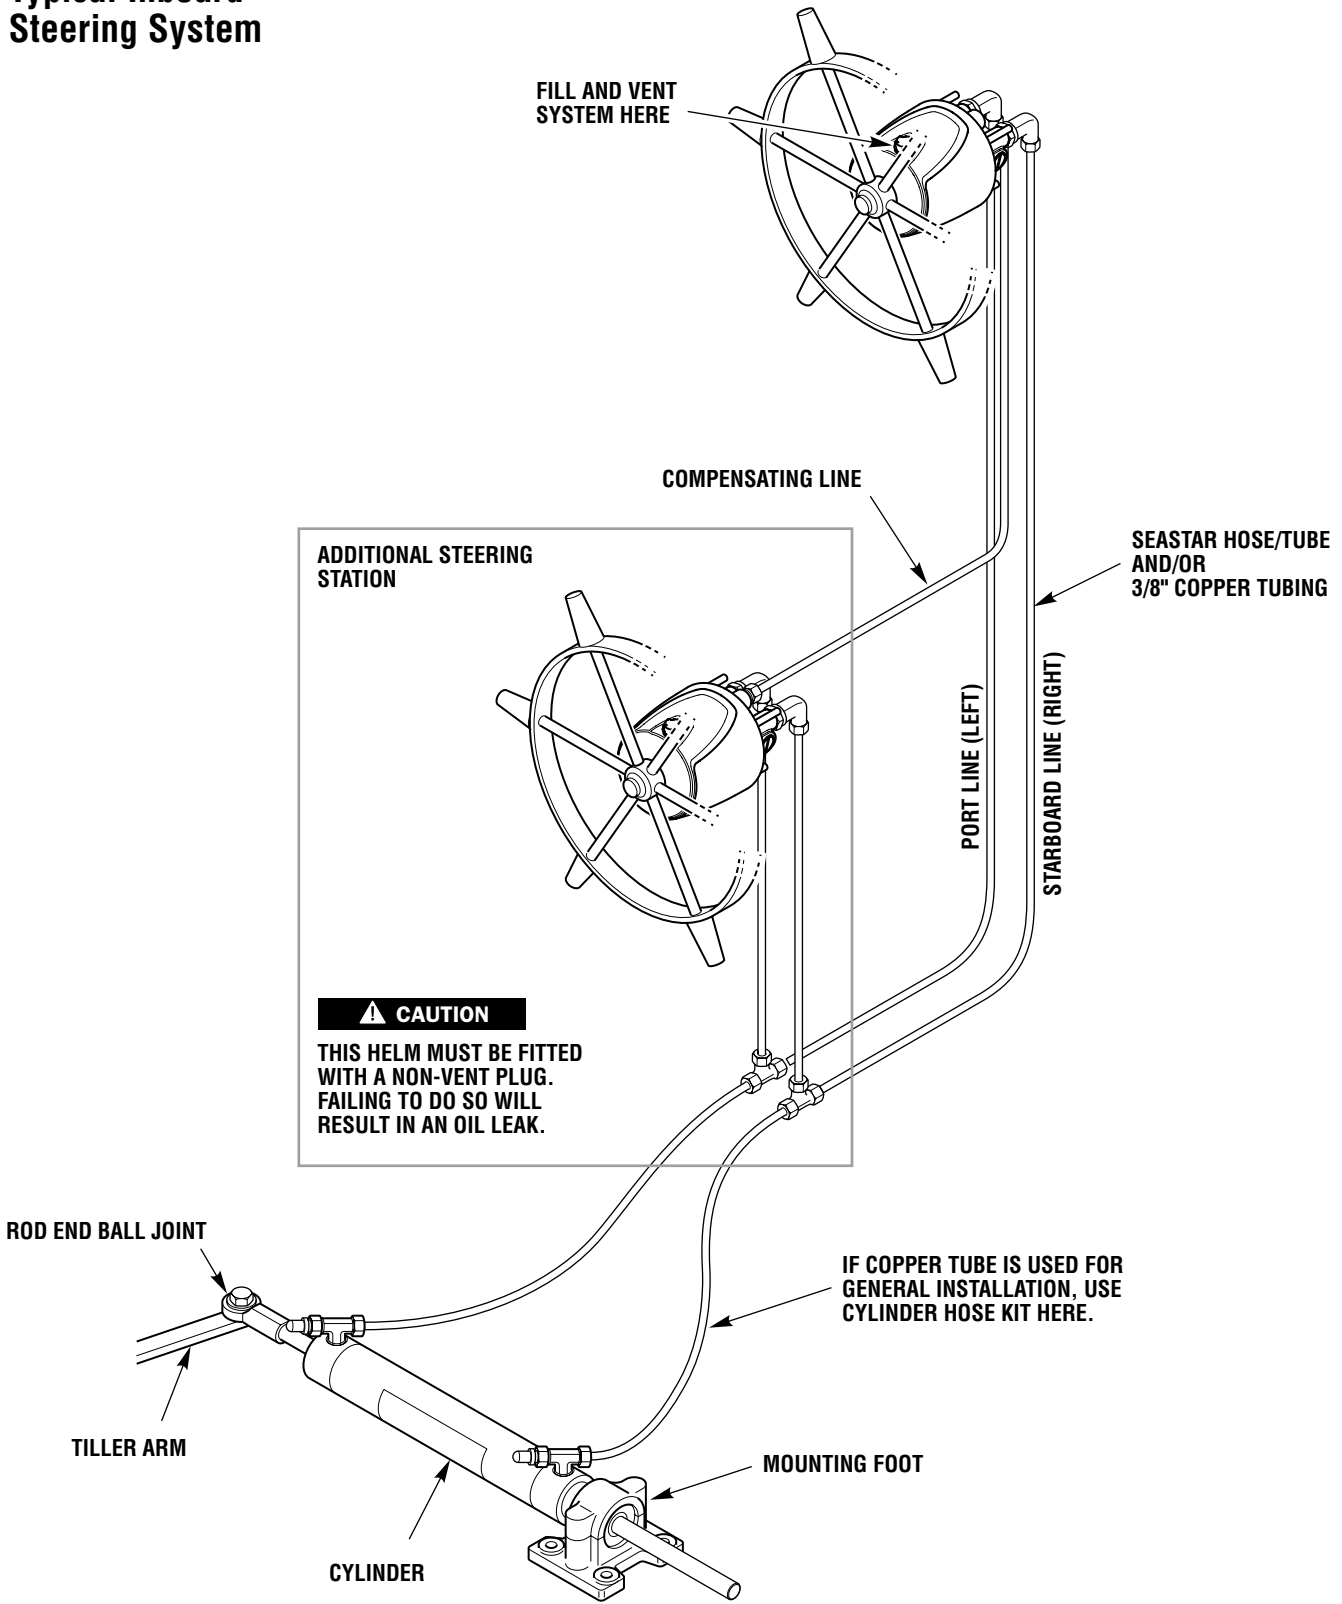


Figure 1. Overview.

# TOOLS

---

## Standard Helm Mounts

You will need the following tools to complete your installation.

- 3" (77mm) diameter Hole Saw or Key Hole Saw.
- 5/16" (8mm) dia. Drill.
- 7/16", 9/16", 5/8" and 3/4" Open End type Wrench/Spanner.
- 15/16" Socket.

---

## Optional Helm Mounts

- Square Bezel Backmount, HA5418, 4-1/2" (115 mm) Hole Saw
- Round Bezel Backmount, HA5478, 4-3/8" (112mm) Hole Saw
- Rear mount Helm, HH5261, 1-1/6" (27mm) drill
- Tilt Helms 4-1/2" (115mm) Hole Saw
- 20° Wedge Kit HA5419 and HA5408

---

## Additional Tools Needed

### 20° Mount Wedge

- Key Hole or Sabre Saw
- 5/16" (8mm) dia. Drill
- 1/2" Wrench/Spanner, Box or Open End type
- 7/16" Socket and Drive

### Cylinder, ATM and TM Models

- 3/4" Wrench/Spanner, Box or Open End type, 2 required.

### Cylinder, Model HC5328-3 (125-8EM)

- 1-5/16" Wrench/Spanner, Open or Adjustable type.

### Cylinder, Other Models

- No special tools required.

---

## CAUTION

**Do not remove protective caps from fittings and fitting ports until hose or tube connections are made. Contaminants in the steering system may cause premature wear and steering malfunctions.**

---

## NOTICE

*Disposing of excess, left over, or used fluid. If the original oil bottle is unavailable, dispose of the steering fluid in an environmentally conscientious manner, adhering to local and federal environmental regulations.*

*Always wear safety glasses and protective clothing when working around hydraulic fluid and components.*

# THINGS YOU NEED TO KNOW

## **⚠ WARNING**

**DO NOT use SeaStar PRO helms with ANY unbalanced steering cylinder. Use of a PRO helm with an unbalanced cylinder will lead to a lock up of the steering wheel preventing further steering control, resulting in collision with an obstacle causing property damage, personal injury and/or death.**

## **⚠ CAUTION**

**SeaStar/SeaStar PRO Steering Hoses CANNOT be cut. Cutting these hoses will render them useless and a new hose will be required.**

## **⚠ CAUTION**

**BEFORE beginning with this installation, confirm that ALL components have been acquired to complete the installation, including; helm pump(s), hose and tube, oil, pipe sealant and any other component required. DO NOT USE Teflon tape. ONLY use a “liquid”, Teflon based pipe sealant (such as Loctite® 542).**

## **⚠ CAUTION**

**Take EXTREME care not to allow any foreign material or contamination to enter the hydraulic steering system. Contamination is the main cause of a hydraulic system to wear and or fail. Protect ALL hose/tube ends until ready to make final connection to fitting.**

## **⚠ WARNING**

**Follow the maintenance procedures outlined on page 25 of this manual as well as ALL other manuals included with the other components of your steering system. Following these procedures, in the time frame noted will keep you and your passengers safe from the dangers that are present on the water. Failure to adhere to ALL maintenance procedures included in ALL Installation and Owner’s Manual may result in loss of steering control. Loss of steering control may lead to unpredictable boat behavior, leading to a collision with an obstacle and/or ejection from the boat, resulting in property damage personal injury and/or death.**


## **Before Starting**

Study this manual and ALL other manuals provided with your SeaStar Steering System carefully and thoroughly to familiarize yourself with all of the components and their intended or required mounting locations. Ensure there is adequate space available for installation of ALL components, hydraulic lines and easy access for service. It is good practice to mount all components first, before running hoses; this ensures the least chance of an error in hose/tube to fitting connections. If you must run hoses first a system of marking the various lines must be used. ALL hose/tube ends MUST be closed off with tape or similar material to prevent contamination. Read ALL BOLD print text, notes, cautions and warnings; reading these now will help prevent unexpected surprises during the installation.

These instructions have been made as complete as possible, but as brief as practical. If you have any questions please phone Teleflex Canada, Technical Support @ 604.248.3858

# SYSTEM INSTALLATION OVERVIEW


## STEP 1



### System Installation

- Install your SeaStar helm pump(s) onto the dash using the installation instructions provided with your helm pump(s).
- **⚠ WARNING** DO NOT use a SeaStar PRO helm with an unbalanced cylinder.
- Install steering cylinder as per the instructions on the following pages.
- **NOTICE** Ensure that you follow the installation instructions for YOUR Steering Cylinder.
- Install hose/tube as per the plumbing diagrams shown on page 15.

## STEP 2



### Filling and Purging Procedures

- Manual purging: Refer to page 19 of this manual for bleeding details.
- Power Purging: Refer to Power Purge Installation Manual.

## STEP 3

### System Check

- **⚠ WARNING** The System Check shown on page 24 of this manual **MUST** be completed after installation. Doing so will ensure the safe operation of your steering system. Any fault (leaks or malfunction) will present itself during this check. Failure to perform this check may result in loss of steering control. Loss of steering control may lead to unpredictable boat behavior, leading to a collision with an obstacle and/or ejection from the boat, resulting in property damage personal injury and/or death.

# CYLINDER MOUNTING

## All Inboard ATM & TM/TMC Models

### General

Proper cylinder mounting is CRITICAL to the successful operation of your hydraulic steering system. An incorrectly installed cylinder WILL lead to rapid seal and bearing wear as well as non-repairable damage.

Select the diagram and dimensional data that corresponds with your cylinder model. Note, not all possible cylinder mounting configurations are shown, however, all necessary dimensions are shown regardless of mounting configurations.

### ⚠ CAUTION

*If installing rudder stops, ensure that the cylinder(s) reach hard-over BEFORE rudder stops are engaged.*

### ⚠ WARNING

Where applicable, cylinders should be secured with thru bolts, NOT with lag screws. Failure to adhere to this warning may result separation of steering components leading to loss of steering control, which may result in unpredictable boat behavior, leading to a collision with an obstacle and/or ejection from the boat, resulting in property damage personal injury and/or death.

### ⚠ CAUTION

Cylinder hose/bleeder fittings must always be installed in the uppermost position. If this is not possible the cylinder must be disconnected from mount to allow the bleeder fittings to be in the up-right position, then, once all air is removed the cylinder can be re-installed. Leaving air in the system will drastically affect performance of your steering system.

### ⚠ CAUTION

Protect cylinder shafts from nicks and scratches. A damaged cylinder shaft can not be repaired and a new cylinder will need to be purchased.

All parts used are corrosion resistant, however with extended operation under extremely corrosive conditions, corrosion may occur and affected parts should be replaced.

In order to avoid excess steering loads and to optimize steering performance, outdrive trim tabs must be adjusted in accordance with the engine manufacturer's instructions for specific boat/motor combinations. Failure to do so will drastically change the performance and handling characteristics of your boat.



**Inboard ATM Cylinder Models:**

- HC5312-3 (BA125-7ATM)
- HC5313-3 (BA135-7ATM)
- HC5314-3 (BA150-7ATM)

**NOTICE**

- 1 Minimum side loading of cylinder rod and maximum cylinder performance of ATM and TM Models can be achieved as illustrated below.  
An imaginary line drawn through the tiller arm hole at both hard over positions will create the cylinder centre line. With tiller arm at hard over positions, angle X and Y should be the same.

To achieve MAXIMUM cylinder performance it is suggested that an imaginary line is drawn through the tiller arm hole at both hard over positions (see figure 2), this will create the "cylinder center line". With the tiller arm at hard over positions, angle X and Y should be the same.

**NOTICE**

In order to obtain a correct push and pull angle between the tiller arm and cylinder, or tiebar and cylinder, the cylinder should be parallel to the transom, tiebar or the keel line (depending on your mounting configuration) when cylinder rod is fully extended (out) or fully retracted (in).

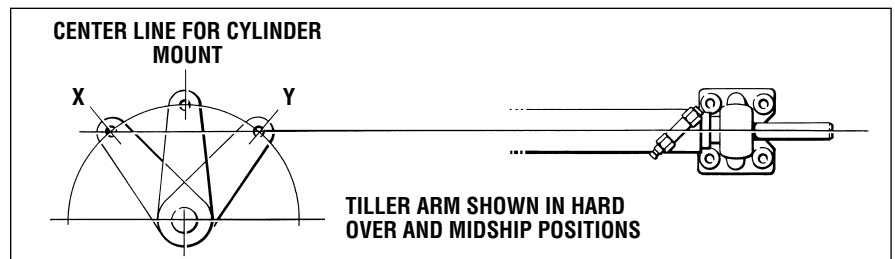


Figure 2.

- 2 Set rudder(s) in the fore and aft position and then attach rod end ball joint to the tiller arm or tiebar.
- 3 Remove caps from cylinder hose fittings.
- 4 Extend cylinder rod to arrive at 20" (508 mm) from center of rod end ball joint hole to the center of the mounting foot, (as shown in figure 3 below).

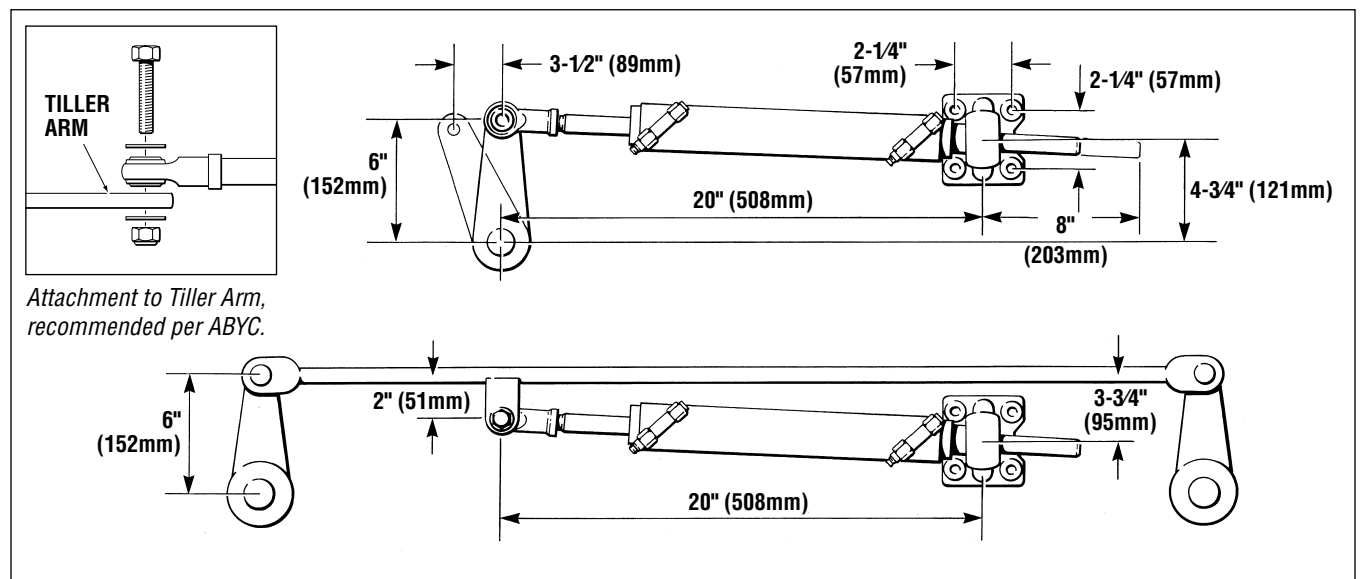


Figure 3.

## HYDRAULIC STEERING

INBOARD (ATM)

### ⚠ CAUTION

There is **NO** adjustment for centering cylinder after installation. **Correct mounting is critical at this time. Total cylinder travel is 7" (178mm).**

### NOTICE

*For twin rudders, the cylinder may be mounted directly to the tiebar or to one of the tiller arms. ENSURE all measurements remain the same as if mounting to a rudder arm.*

- 5 Secure mounting foot to transom or mounting bracket using four 5/16" (8mm) Grade 5 bolts (corrosion resistant) and self-locking nuts.
- 6 BEFORE final hose/tube connection, swing rudder(s) back and forth to ensure free movement of cylinder and that there is no binding of the rod end ball joint.

### ⚠ WARNING

**Any binding and or interference MUST be corrected prior to use. Failure to do so may lead to separation of components and/or prevention of steering control. Separation of components or loss of steering control may lead to unpredictable boat behavior and/or a collision with an obstacle and/or ejection from vessel resulting in property damage, personal injury and/or death.**

### ⚠ CAUTION

**The cylinder ball mount allows up to 15 degrees of movement MAX. Any movement beyond 15 degrees will result in premature seal and/or bearing wear.**

### Jet Drive Cylinders:

HC1503-3 (BA150-3ATM),  
HC5303-3 (BA125-3ATM)  
HC6324-3 (BA150-3.5ATM)

These cylinders are generally used in jet drive applications. ALL warnings, cautions and notices shown on page 5 and this page are to be followed to ensure safe operation of the steering system. Teleflex does not make a recommendation as to the installation to a jet drive. The measurements shown below are used to assist with the installation.

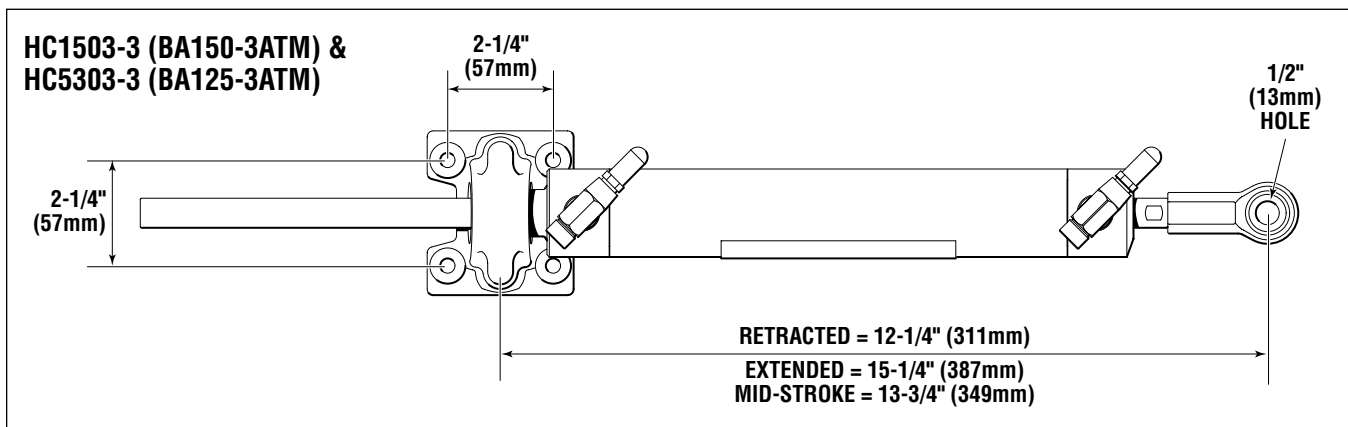


Figure 4.

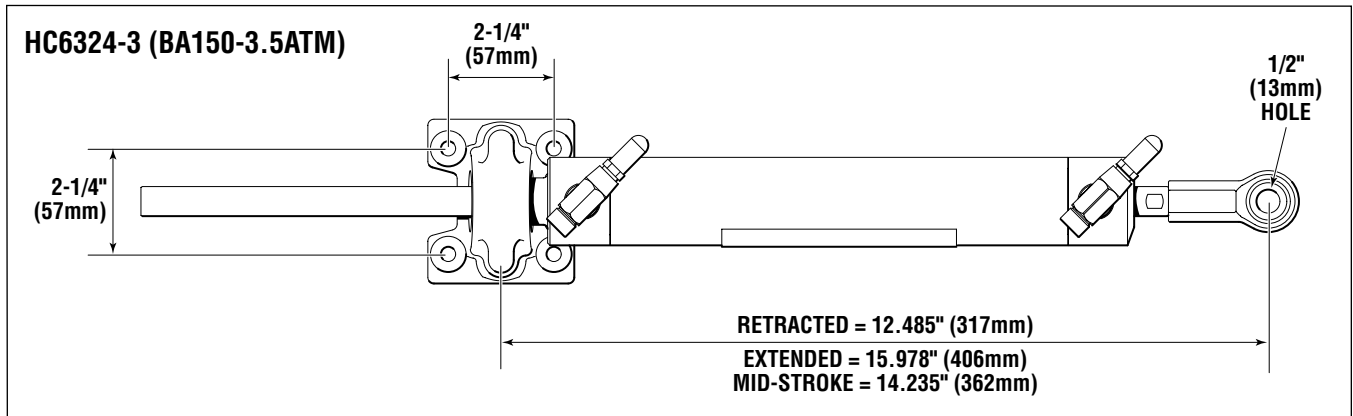


Figure 5.

**Inboard, TM & TMC  
Cylinder Models:**

- HC5318 (BA150-7TM)
- HC5319 (BA175-7TM)
- HC5369 (BA150-9TM)
- HC5373 BA175-9TM)

- 1 To achieve MAXIMUM cylinder performance it is suggested that an imaginary line is drawn through the tiller arm hole at both hard over positions (see figure 6), this will create the “cylinder center line”. With the tiller arm at hard over positions, angle X and Y should be the same.

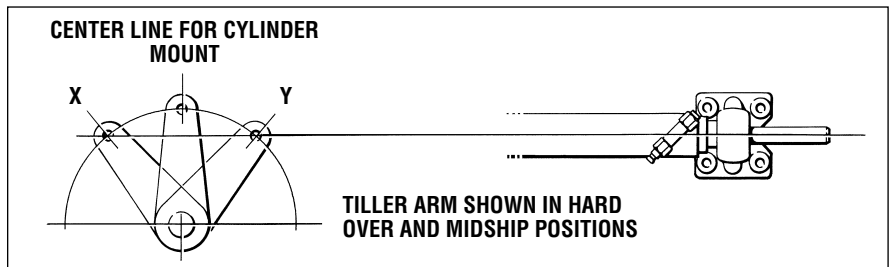


Figure 6.

- 2 Set rudder(s) in the fore and aft position and then attach rod end ball joint to the tiller arm or tiebar.
- 3 Remove caps from cylinder hose fittings.
- 4 Extend cylinder rod to arrive at 21" (533 mm) or 23-1/4" (591 mm) from center of rod end ball joint to the center of the mounting foot. See figure 7.

**NOTICE**

*In order to obtain a correct push and pull angle between the tiller arm and cylinder, or tiebar and cylinder, the cylinder should be parallel to the transom, tiebar or the keel line (depending on your mounting configuration) when cylinder rod is fully extended (out) or fully retracted (in).*

**CAUTION**

**There is NO adjustment for centering cylinder after installation. Correct mounting is critical at this time. Total cylinder travel is 7" or 9" (depending on your cylinder model)**

**NOTICE**

*For twin rudders, the cylinder may be mounted directly to the tiebar or to one of the tiller arms. ENSURE all measurements remain the same as if mounting to a rudder arm.*

## HYDRAULIC STEERING

### INBOARD (TM & TMC)

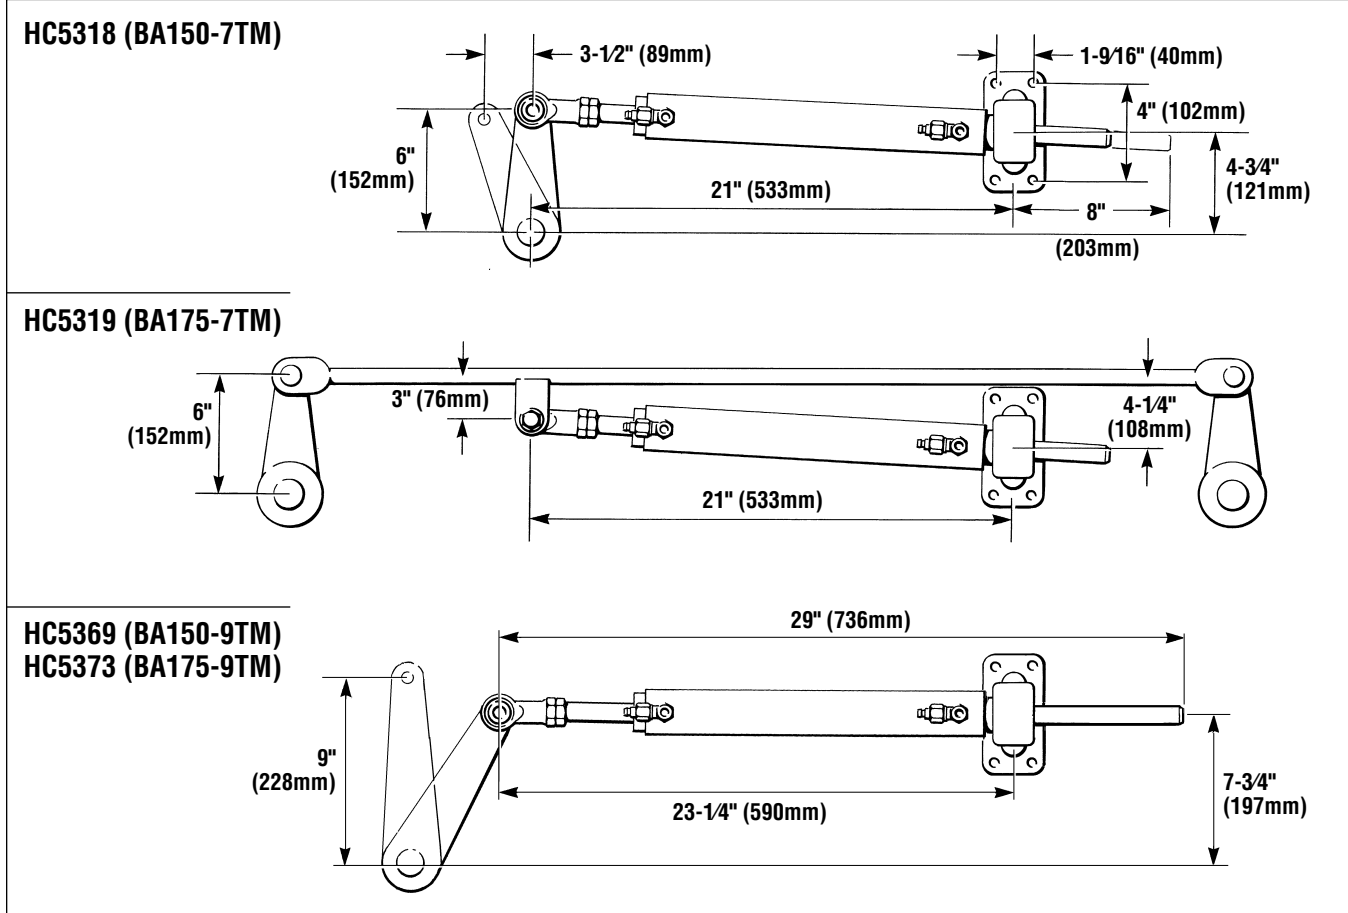


Figure 7.

- 5 Secure mounting foot to transom or mounting bracket using four 3/8" (10mm) Grade 5 bolts (corrosion resistant) and self-locking nuts.
- 6 BEFORE final hose/tube connection, swing rudder(s) back and forth to ensure free movement of cylinder and that there is no binding of the rod end ball joint.

### ⚠ WARNING

**Any binding and or interference MUST be corrected prior to use. Failure to do so may lead to separation of components and/or prevention of steering control. Separation of components or loss of steering control may lead to a collision with an obstacle and/or ejection from vessel resulting in property damage, personal injury and/or death.**

### ⚠ CAUTION

**The cylinder ball mount allows up to 15° of movement MAX. Any movement beyond 15° will result in premature seal and/or bearing wear.**

# Sterndrive Engine Mount Cylinders

## ⚠ WARNING

**DO NOT use SeaStar PRO helm(s) with an unbalanced cylinder. Using a PRO helm with an unbalanced cylinder WILL lead to steering wheel “lock-up”. Lock-up may lead to collision with an obstacle resulting in property damage, personal injury and/or death.**

## NOTICE

*Sterndrive cylinders are designed for use, in conjunction with, the engine manufacturer's power steering system. DO NOT Install into an application that does not use the engine manufacturers power steering.*

## General

- 1 A support tube and/or cable support tube provided by the engine manufacturer **MUST** be used for these three steering cylinders. These cylinders are mounted to the sterndrives support/tube guide support in the same manor as a steering cable.
- 2 Thoroughly lubricate support tube/cable guide tube, and cylinder rod with a high quality, anti-corrosive type marine grease (such as OMC Triple Guard or equivalent) **BEFORE** mounting cylinder to support tube.
- 3 Slide well greased cylinder rod into and through well greased support/cable guide tube and thread cylinder fully onto support tube as shown below.

HC5328-3 (125-8EM)  
HC5329-3 (128-8VEM)

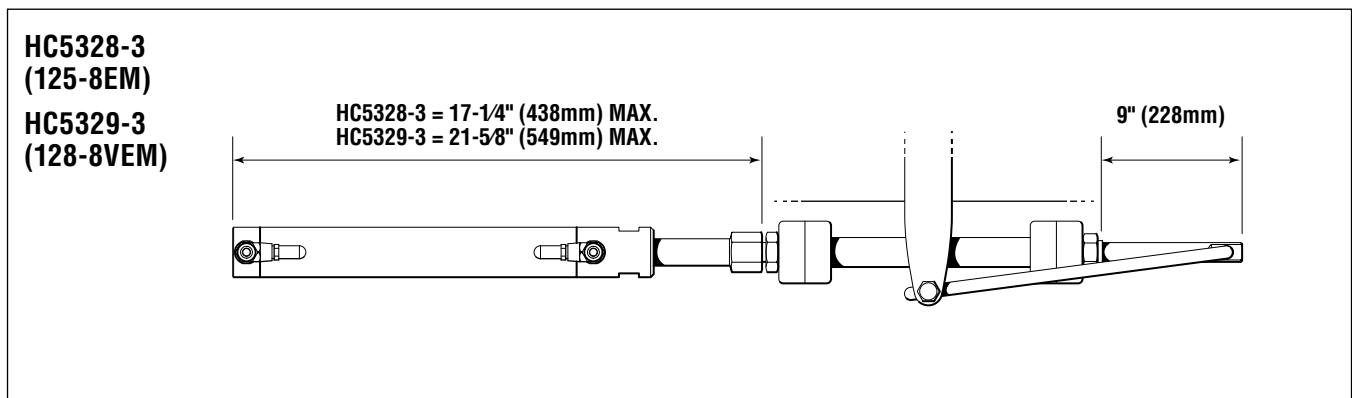


Figure 8. HC5328-3 (125-8EM) and HC5329-3 (128-8VEM), **NOT for use with SeaStar PRO helm(s).**

## HYDRAULIC STEERING

### STERNDRIVE

#### HC5331-3 (92VPS)

Referring to Figure 9 please observe the following:

- Rotate Cable Tube item 1 into threads of Item 2 until tight.
- Torque setscrew (item 7) to 90 in-lbs and tube insert (item 8) until tight.
- Item 3 must pass through items 4 and 5 before being secured by Item 6.
- Always mount cylinder in lower mount position of item 2 and without spacer item 9, unless mechanical interference prevents you from doing so.

#### ⚠ CAUTION

**Cut Clevis Pin, (item 3 Figure 9) to a length of 2" when mounting cylinder in lower position.**

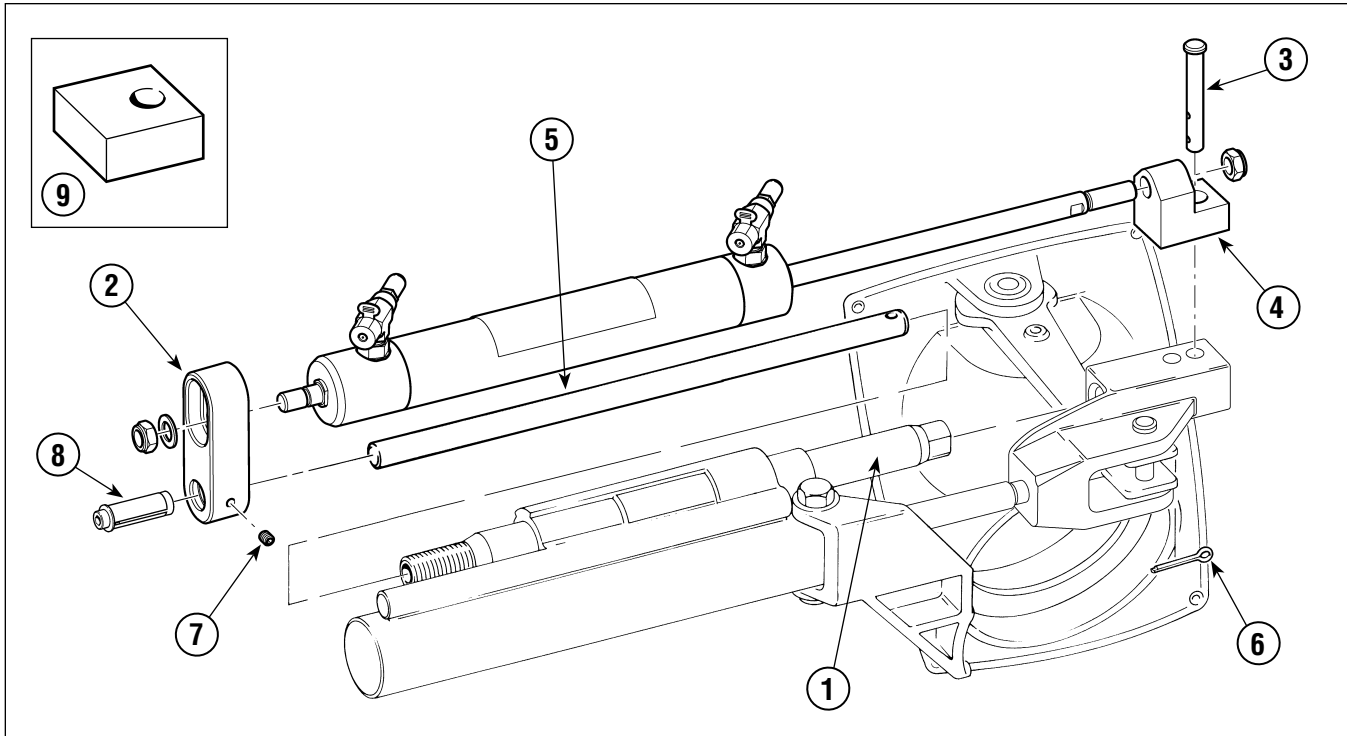


Figure 9. HC5331-3 (92-VPS), **NOT for use with SeaStar PRO helm(s).**

#### NOTICE

*The Teleflex HC5331-3 steering cylinder is NOT compatible with some early model power steering rams. Although the cylinder will still mount to these rams, loss of articulation and possible damage to the steering ram may result. Please identify your power steering cylinder by comparing your clevis bracket to the 4 drawings shown below. The HC5331-3 IS compatible with units identified by figures 10 to 12, it is NOT compatible with the clevis bracket shown in figure 13.*

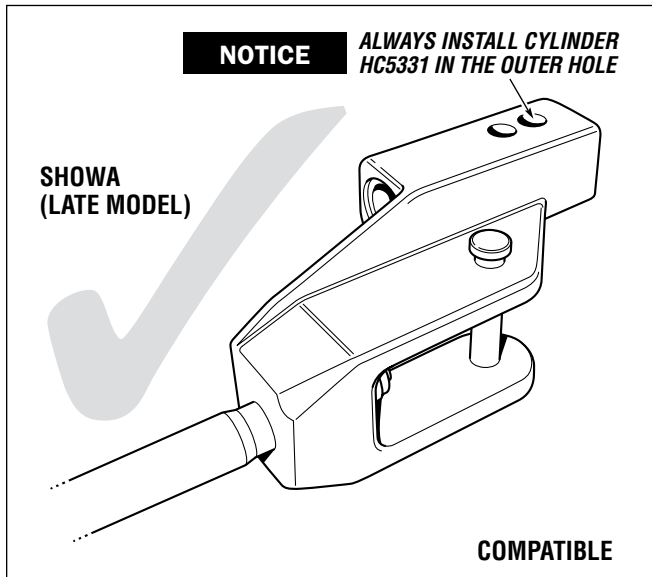


Figure 10.

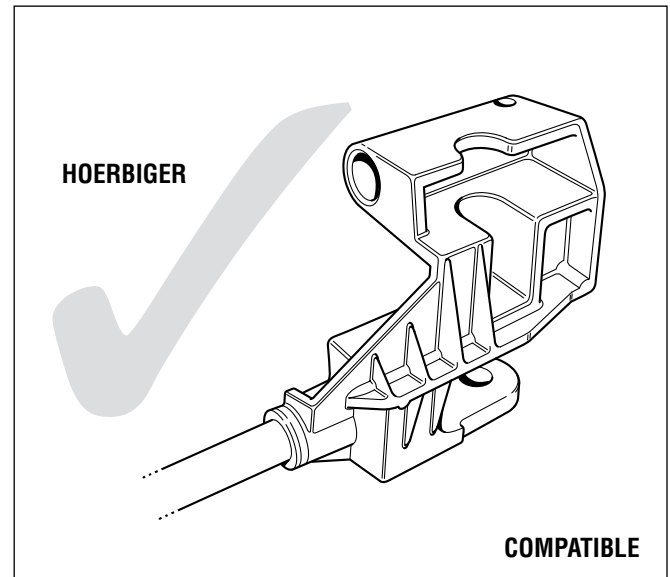


Figure 11.

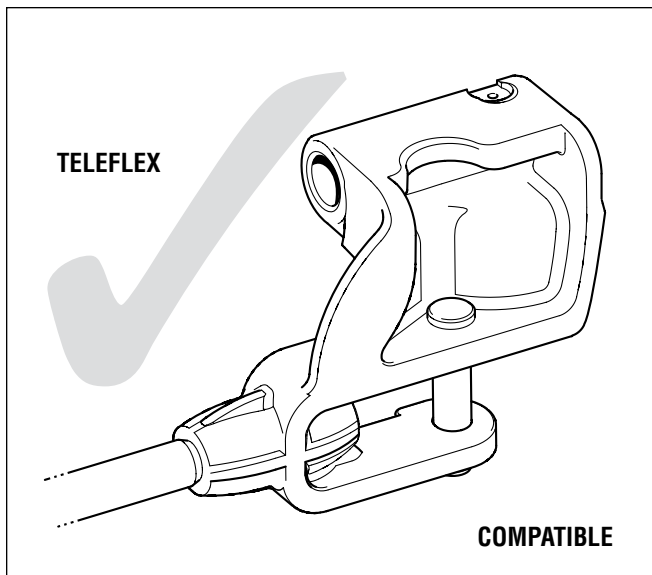


Figure 12.

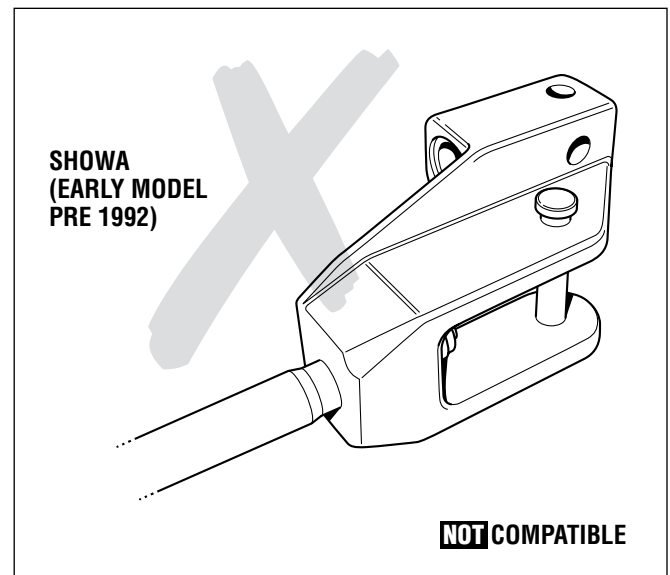


Figure 13.

## HC5339-3 (125-6.5EM) Installation Instructions

*Mercury Bravo I and II ONLY*

- 1** Move the main steering ram to the fully retracted position.
- 2** Insert the long rod of the HC5339-3 cylinder into the clevis bracket until the through hole in the rod is aligned with the hole in the clevis bracket. Refer to figure 14.
- 3** Insert the 1/4" NF socket cap screw through the hole and install the shoulder nut. Torque to 72 in.lb.
- 4** Extend HC5339-3 cylinder as required and insert the short rod into the tilt tube as shown in figure 15.
- 5** Tighten the large mounting nut to 150 in.lb. Use wrench flats to stop the tilt tube from turning.
- 6** Install hoses and purge the system as shown on page 19.

# HYDRAULIC STEERING

## STERNDRIVE

### ⚠ WARNING

If Mercruiser power steering fails, service unit immediately or complete loss of steering may result.

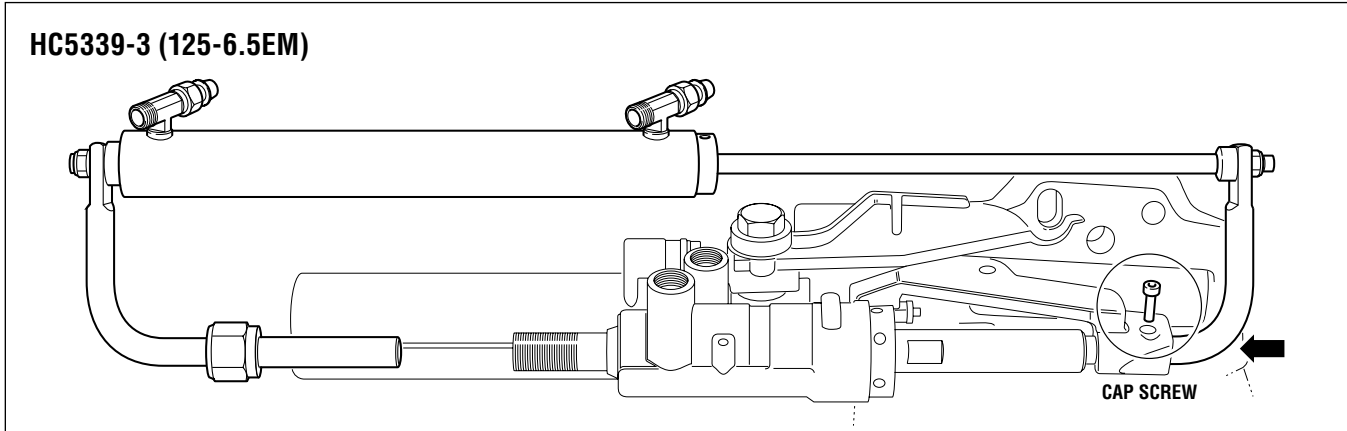


Figure 14.

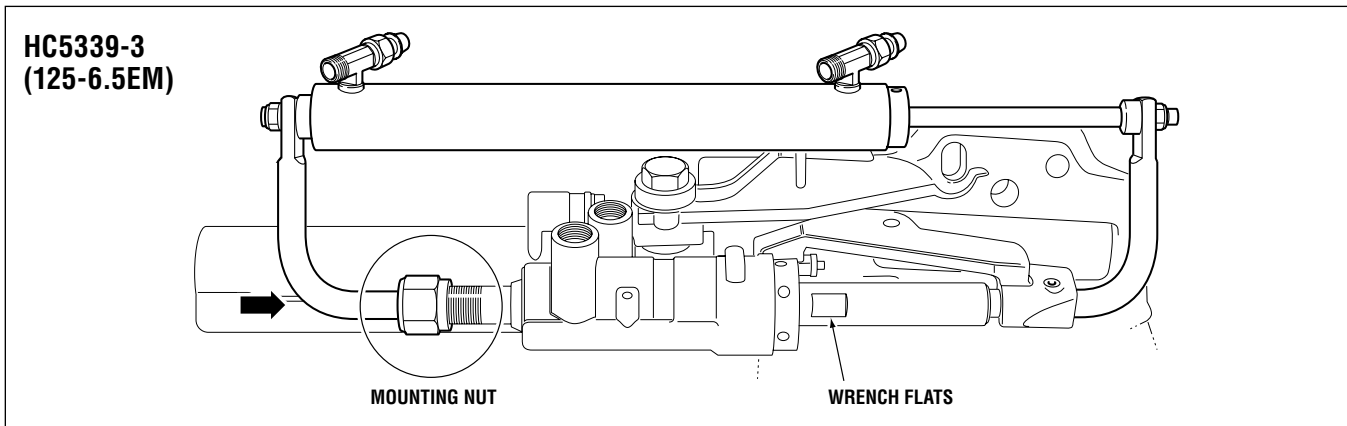


Figure 15.

### Sterndrive Engine mounted, NON-Power Steering models:

#### HC5330-3 (BA125-8EMV)

Support Tube Mount

**A Support Tube Mount** – Requires support/cable tube from engine manufacturer for installations.

**NOTICE** HC5326-3 is designed for use with 1984 – DATE Mercruiser and MOV Cobra NON-Power Assisted steering sterndrives (OMC Cobra requires Teleflex part# HA5424 to complete installation). DO NOT USE on a power assisted application.

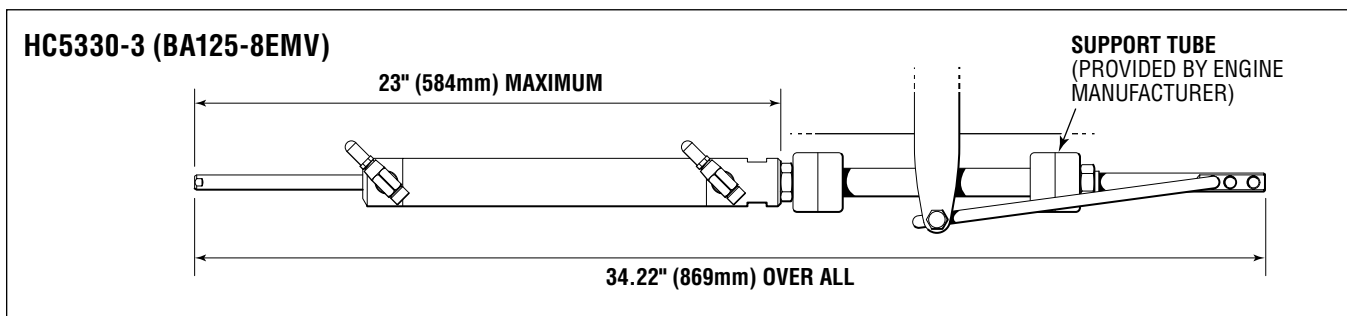


Figure 16. HC5330-3 (BA125-8EMV), manual, non-power steering.



**HC5326-3 (BA150-7EM)**

*Transom Bracket Mount*

**A Transom Bracket Mount** – Mounts directly to the transom bracket and tiller arm.

This cylinder is designed for use with 1984 to date Mercruiser, and OMC Cobra non power assisted steering sterndrives (OMC Cobra requires Teleflex part HA5424). Sterndrives equipped with optional power assist steering require Cylinder Model 125-8EM.

**NOTICE**

*Quicksilver Clevis Adapter Kit, part No. B98735A1 is required to complete cylinder connection to Mercruiser sterndrives. This part is supplied with the Quicksilver Tie Bar Kit for twin sterndrives.*

**⚠ CAUTION**

**When connecting the cylinder to a Mercruiser the two washer spacers must be installed between the cylinder and mounting bracket. When connecting the cylinder to an OMC Cobra, the two bushings must be inserted to the cylinder mounting holes.**

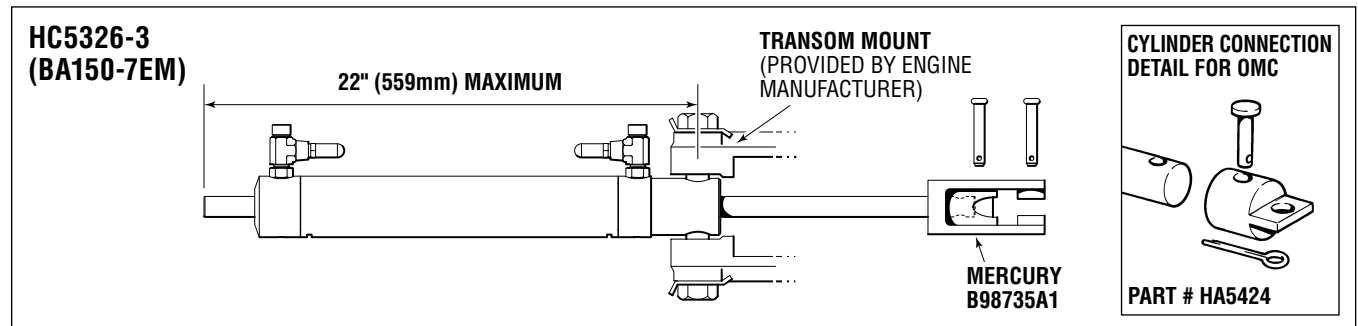


Figure 17. HC5326-3 (BA150-7EM), manual, non-power steering.

**HC5332-3 (BA135-7EM)**

*Transom Bracket Mount*

**A Transom Bracket Mount** – Mounts directly to the transom bracket and tiller arm.

**NOTICE** HC5332-3 requires the use of SeaStar OUTBOARD hoses ONLY.

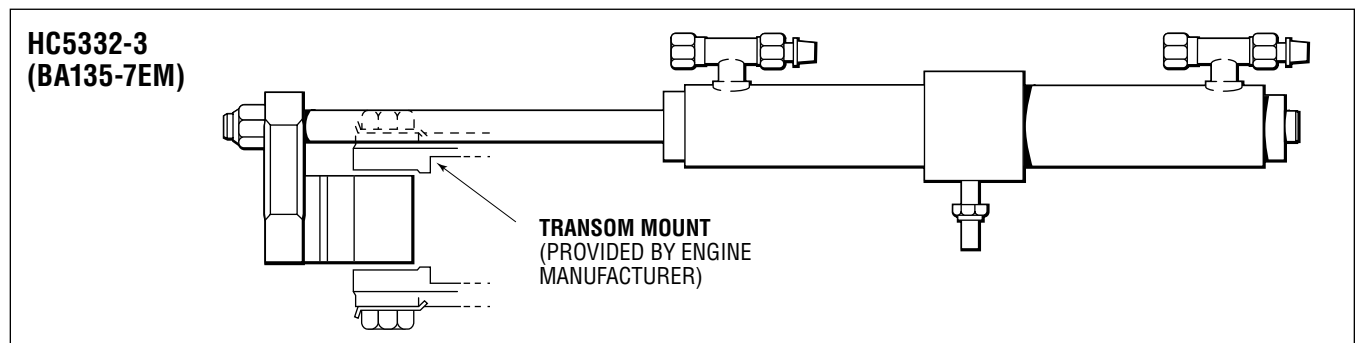


Figure 18. HC5332-3 (BA135-7EM) manual, non-power assist.

**NOTICE**

For cylinder model HC5332-3 If engine outdrive is NOT equipped with a torque tab on the underside of the lower leg, one **must** be installed to reduce prop torque.

**⚠ CAUTION**

**HC5332-3 cylinder MUST use SeaStar Outboard Hoses. DO NOT install extruded nylon tubing or copper tubing directly to this cylinder.**

# HOSE AND TUBING INSTALLATIONS

## General

Proper steering hose/tube is required for the best performance and safe operation of your steering system. Use of a hose/tube other than that recommended by Teleflex may drastically effect performance and the safe operation of your system. Teleflex Marine cannot be responsible for ANY consequences resulting from the use of a substitute tube or hose.

## WARNING

**Use of a substitute hose and/or tube may lead to hose breakage or rupture resulting in loss of steering control. Loss of steering control may lead to unpredictable boat behavior and/or a collision with an obstacle and/or ejection from boat, resulting in property damage, personal injury and/or death.**

## NOTICE

*Sterndrive, non-power assist cylinder part # HC5332 and HC5332-3 requires the use of SeaStar Outboard style HOSE. Do NOT use extruded nylon tubing with this cylinder.*

## Copper Tubing

Teleflex Marine recommends the use of copper tubing where steering tube runs exceed 40 feet (see copper specifications below). Failure to install copper tubing in these applications may result in stiff/unresponsive steering. A series of copper tubing and flexible connections must be used, copper tubing CANNOT be connected directly to a steering cylinder, and a flexible connection MUST be used.

### Copper Tubing specifications

- 3/8" OD.
- Seamless Copper Tube for Air Conditioning and Refrigeration made under ASTM B-280.
- Compression fittings shipped with steering cylinder(s) will work with the above specifications.

## CAUTION

**Never attach copper tubing or any other rigid type tube directly to the cylinder. Cylinders require a flexible link to allow for vibration and cylinder movement during steering articulation.**

## Positional O-Ring Horizontal and Vertical Tee Fitting Installation/Realignment (if required)

- 1 Back off lock nut (item 1, figure 19), counter-clockwise, until it stops.
- 2 Thread fitting into cylinder body until fitting washer (item 2, figure 19) contacts the face of the cylinder port. Tighten hand tight, DO NOT TORQUE FITTING INTO GLAND.
- 3 Position fitting to desired orientation by turning it counter-clockwise to a MAXIMUM of 1 full turn.
- 4 While holding fitting with a wrench, tighten the locknut (item 1, figure 19) and torque to 40–43 ft-lb.
- 5 Purge system as per your cylinder instruction manual.

**! WARNING**

Failure to properly tighten the locknut (item 1, figure 19) may lead to loss of steering control. Loss of steering control may result in unpredictable boat behavior, collision with an obstacle and/or ejection from vessel, leading to property damage, personal injury and/or death.

**! WARNING**

Teleflex recommends that the hose and hose fittings are checked on a regular basis to ensure the safe operation of the steering system.

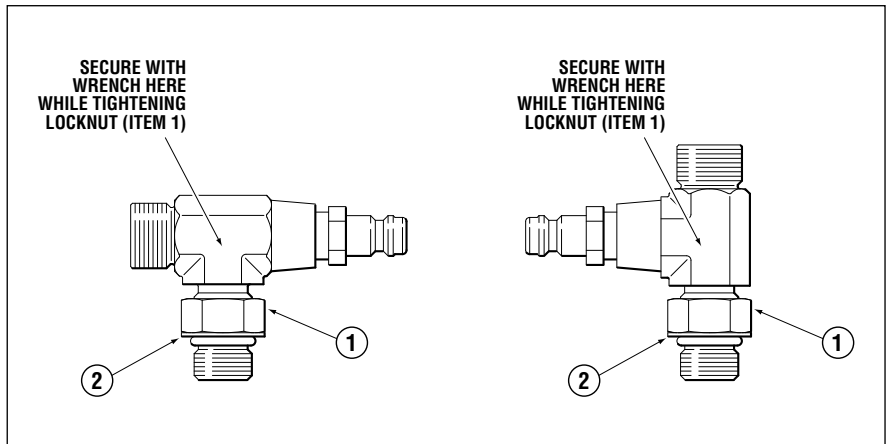


Figure 19.

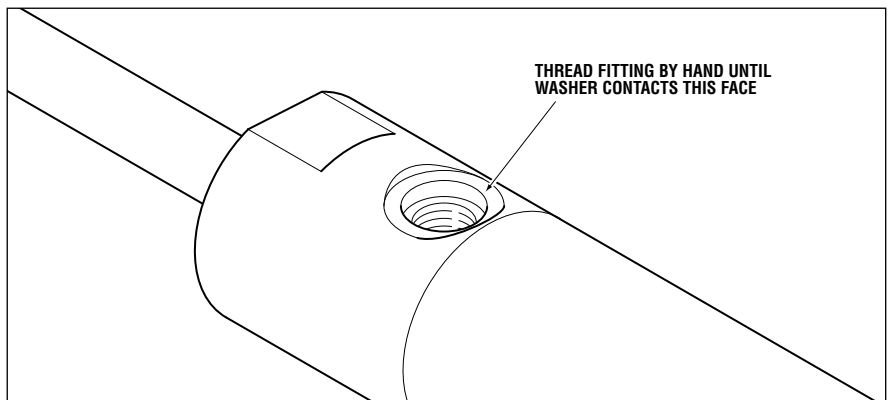


Figure 20.

**System Connection**

- 1 Refer to figure 21 on page 16 for hose/tube to fitting connection.
- 2 If not already completed, install hose/tube fitting into helm pump(s) using a “liquid” Teflon based pipe sealant.

**! CAUTION**

There is **NO** requirement for any pipe sealant of any kind when installing the adjustable O-Ring hose fittings into the cylinder body, or on the hose side of the fitting. When installing fittings into helm pump. A liquid, Teflon based pipe sealant is only required on fittings being threaded into a helm pump port. **NEVER** use a tape sealant.

## HYDRAULIC STEERING

### HOSE & TUBE INSTALLATION

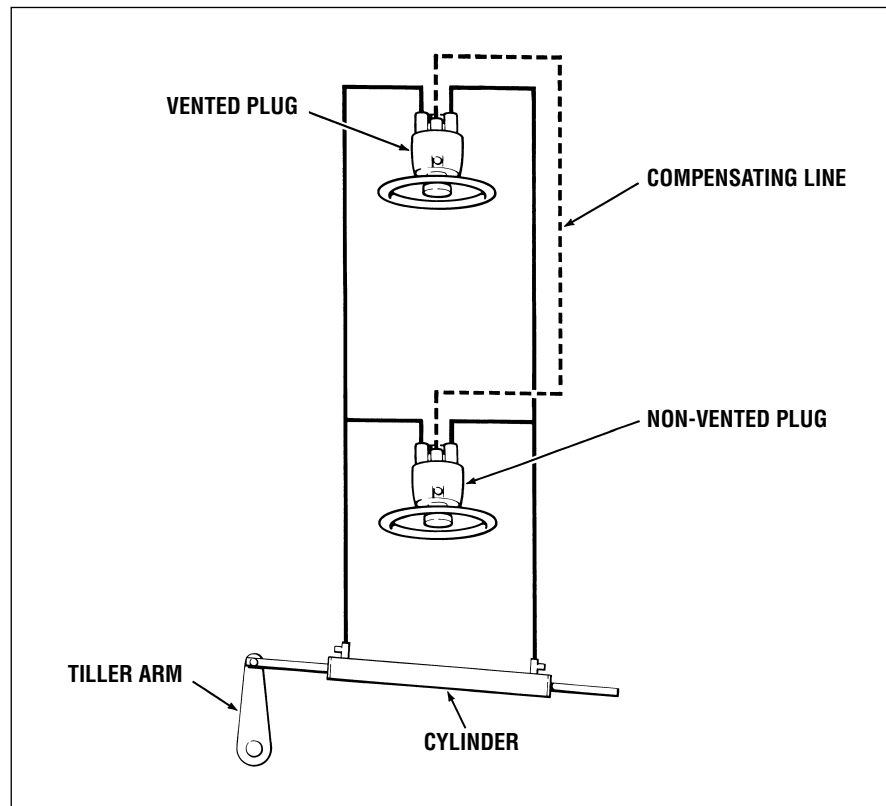


Figure 21. Dual Station.

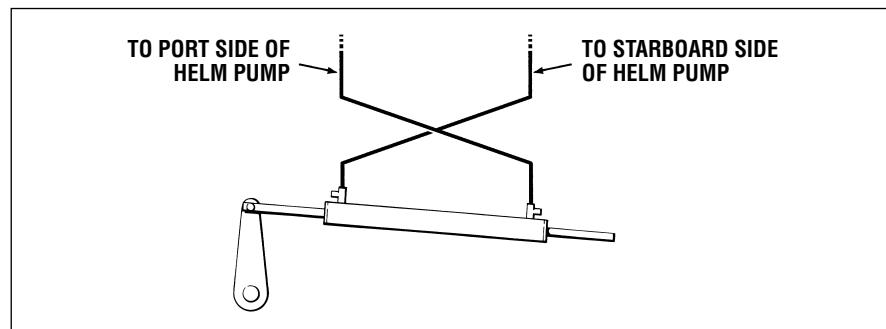


Figure 22. **HC5332-3 Cylinders ONLY.** Hoses are crossed when plumbing.

**3** The following considerations **MUST** be taken into account when planning and routing steering hose/tubes.

- a) Cut nylon/copper tubing using an appropriate tube cutter. A straight and level cut is required for proper sealing.

### **CAUTION**

**DO NOT CUT SeaStar Outboard, flexible, hoses. Cutting these will render them useless and a new hose will need to be ordered.**

- b) Do not allow hose/tube to come into contact or come too close to any source of extreme heat. Extreme heat **WILL** lower burst pressure and/or melt hose/tubing resulting in the immediate loss of steering control. Loss of steering control may lead to a collision with an obstacle and/or ejection from boat resulting in property damage, personal injury and/or death.

- c) Hose/Tube must be routed so that it will not interfere with any other functional equipment; (such as, hatches, doorways or in a walking path where it may become a tripping hazard).
- d) Hose/Tube **MUST** be installed with a gradual rise from the steering cylinder to the helm pump(s). If hose/tube is not installed with a gradual rise, air removal from system will be difficult.
- e) Hose/tube should be secured at regular intervals using non-metallic type ties.
- f) Do not allow tubing to rest or chafe against any abrasive material.

**NOTICE**

*Fiberglass although soft to the touch can be extremely abrasive. Care **MUST** be taken when securing hose/tubing.*

- g) Ensure that hose/tube ends are covered prior to passing through bulkheads, cable tubes and any other blind area. Failure to do so may allow contamination to enter the steering system.

**! WARNING**

**If hose/tubing is kinked during and/or after installation it **MUST** be replaced prior to operation. SeaStar Outboard hose cannot be cut and must be replaced with a new hose completely. SeaStar extruded nylon tubing can have the damaged section removed and a union fitting put into place. Failure to replace any damaged hose/tube may result in loss of steering control. Loss of steering control may lead to unpredictable boat behavior and/or a collision with an obstacle and/or ejection from vessel, resulting in property damage, person injury and/or death.**

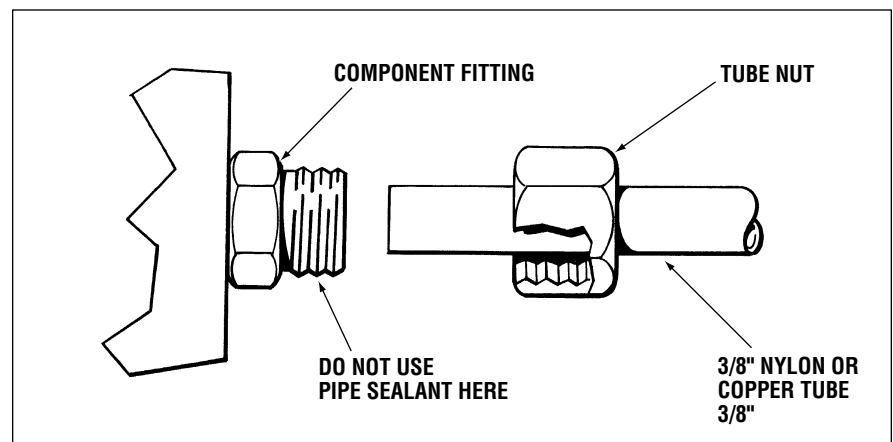


Figure 23.

**4 Connection**

- a) SeaStar Outboard Hose - Thread hose onto appropriate fitting and torque to 15 ft-lb.
- b) SeaStar extruded Nylon tubing and Copper Tubing.
  - Slide tube not over tubing.
  - Push tubing into bottom of component fittings.
  - Hand tighten tube nut, ensuring that the tube is bottomed out against the fitting while tightening.
  - After hand-tight, turn an additional 1-1/2 turn with a 5/8" wrench.

**! CAUTION**

**Ensure that the tubing is pushed ALL the way in.**

# ADDITIONAL STATIONS, AUTOPILOTS AND SEASTAR POWER ASSIST UNITS

## General

ALL SeaStar helm pumps are fitted with internal check valves. These valves allow the installation of multiple steering stations and autopilots. ALWAYS check with autopilot manufacturers to confirm use with a SeaStar Steering System.

Teleflex offers the following “add a station fitting kits” for easy installation.

- **HF5501** For use with SeaStar Outboard, flexible, hoses ONLY. NOTE: this kit comes with a 25’ cut to fit nylon tubing that is to be used for the return line ONLY. Another set of SeaStar Steering hoses, part # H051xx will be required to complete this installation.
- **HF5502** For use with SeaStar Extruded Nylon tubing and/or copper tubing. Designed to splice into existing tubing.

## NOTICE

*The following points should be taken into consideration when installing additional steering stations and/or autopilots. Following these simple points before installation will allow for easier trouble shooting in the future if required*

- Shut-Off valves should be installed into each additional station. Installation of these now will allow for simplified trouble shooting and servicing at a later date.
- Autopilot must be compatible with SeaStar Steering Fluid, MUST have a pressure relief setting of 1000psi (6.9MPa) and MUST work with an unbalanced cylinder if equipped.
- A “return” or “compensating” line will be REQUIRED between all helms, autopilot pumps and SeaStar Power Assist Units. Failure to install this line will lead to improper bleeding, resulting in poor performance by both the steering system and autopilots.
- The “return” or “compensating” line MUST have a gradual rise between steering stations. If hose/tube is not installed with a gradual rise, air removal from system will be difficult.
- SeaStar Power Assist Units can be installed into an inboard type system. If installing a SeaStar Power Assist please be sure to read and understand the installation manual that will come with your SeaStar Power Assist.
- Helms of different displacements can be used in a multiple station system, however; use of a higher or lower displacement will result in; more/less wheel turns and easier/heavier effort at each wheel.

# MANUAL FILLING AND PURGING

## NOTICE

**Power Purge Users.** Please refer to the instructions included with your power purge unit.

## NOTICE

**Power Assist Users.** You **MUST** refer to the bleeding instructions included with your SeaStar Power Assist Unit.

## Read First

Steps 1 – 5 noted on page 21 refer to a single station, single cylinder installation. For twin station and/or twin cylinder installations you **MUST** perform steps 1 – 5 first, then, see page 22 and page 23 to complete the removal of air from the system.

## NOTICE

*This procedure requires two people. One person may not be able to remove all the air from the system which will result in spongy, unresponsive steering.*

During the entire filling procedure, oil **must** be visible in the filler tube. **Do NOT** allow the oil level to disappear into the helm pump, as this may introduce air into the system and increase your filling time.

## Hydraulic Fluid

Acceptable and recommended oils for your steering system are:

- SeaStar Hydraulic Fluid, part #. HA5430
- Texaco H015
- Aero Shell Fluid #41
- Esso Univis N15 or J13
- Chevron Aviation Fluid A
- Mobil Aero HFA
- Fluids meeting Mil H5606C specifications.

## ⚠ CAUTION


**Never use brake fluid. Any non-approved fluid may cause irreparable damage, loss of steering, and cancellation of warranty.**

Automatic transmission fluid Dexron II may be used in an emergency.

In cases of extreme emergency any non-toxic, non-flammable fluid may provide temporary steering.

SeaStar hydraulic oil is not available from your local gas station. Order a spare bottle from your Teleflex/SeaStar dealer.

## Vent Plug (part #HA5431)

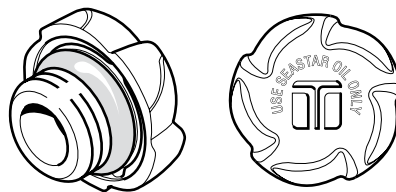


- Must be used with helm pump on all single steering station systems.
- Must be used on upper-most helm pump only on multi-steering station systems.
- Vent hole: actual size as shown.
- Colour: threads, silver – cap, black

Figure 24.

## Non-Vent Plug (part #HA5432)

## ⚠ CAUTION

**Failure to install a non-vent plug in ALL lower helms of multi-helm systems will result in fluid leaking out of the vent cap.**

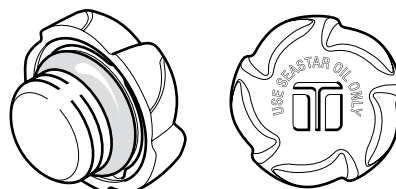

- Must be used on all helm pumps other than upper-most helm pump on multi-steering station systems.
- This non-vent plug is supplied with additional station fitting kit no. HF5501 and HF5502.
- Actual size shown.
- Colour: black (previously silver)

Figure 25.

## HYDRAULIC STEERING

### FILLING AND PURGING

## Hydraulic Oil Requirements

2 bottles (2 quarts or litres) for single station and single cylinder systems.

1 additional bottle for each additional helm, cylinder, or auto pilot.

### NOTICE

*These instructions will result in hydraulic oil flushed in and out of the system. Oil can be re-used if filtered through a fine mesh screen such as used for gasoline. If unable to filter oil, an additional bottle of oil is required.*

### NOTICE

*“Bleeder” refers to cylinders fitted with bleed tee fittings. If fitted with bleed tee fitting, open bleeder by unscrewing bleed nipple nut two turns.*

### ⚠ CAUTION

#### Unbalanced Cylinders.

**The oil level in the helm must be set with the cylinder rod fully retracted. Failing to observe this caution will result in an oil spill at the helm.**

### NOTICE

*Filling the helm full of oil can be done faster if oil is poured into the helm prior to connecting filler tube and oil bottle to the helm.*

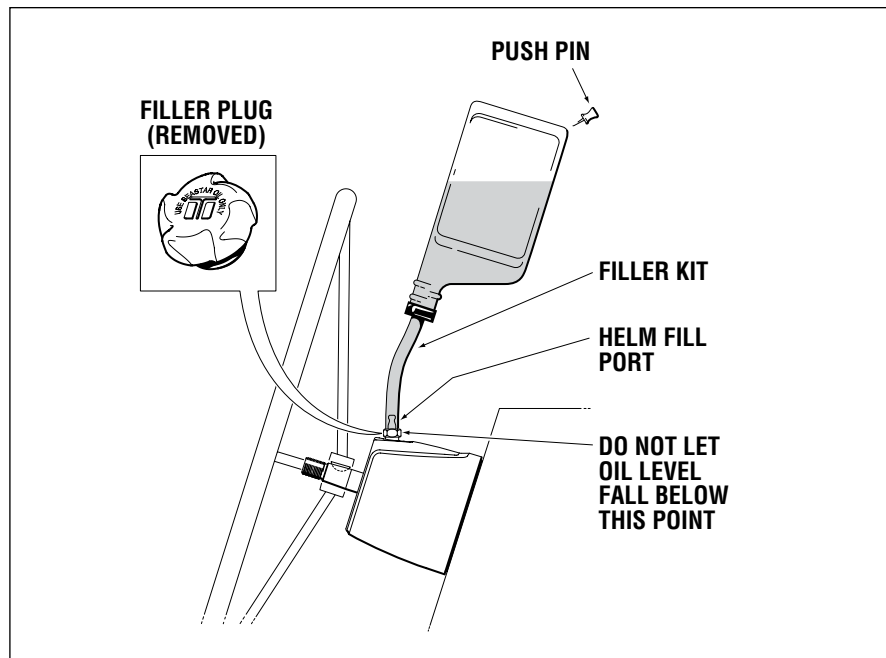


Figure 26




# Single Station One Cylinder

## Step 1

- Screw the threaded end of the filler tube into the helm filler hole.
- Remove the cap from the oil bottle and holding upright, screw into the filler tube bottle cap. Poke hole in the bottom of the bottle.
- Fill the helm pump full of oil (Oil should always be visible in the filler tube). Use the next bottle at any time throughout the procedure when the oil level drops in the filler tube. Do not proceed with step two until helm is full of oil.


Figure 27.



## Step 2

- Turn the steering wheel clockwise until the cylinder rod is fully extended on the left side of the cylinder.
- Open left side bleeder.


Figure 28.

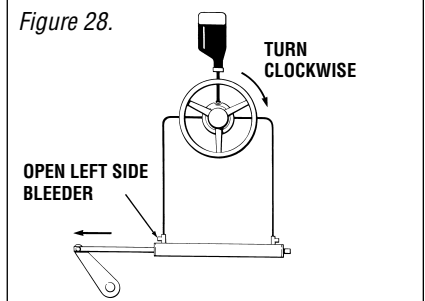

## Step 3

- Holding the cylinder rod (to prevent it from moving back into the cylinder) turn the steering wheel counter-clockwise until a steady stream of air free oil comes out of the bleeder. (Drain out approx. 1/2 bottle of oil or as required.)
- While continuing to turn the wheel, close the left side bleeder and let go of the cylinder rod.


Figure 29.

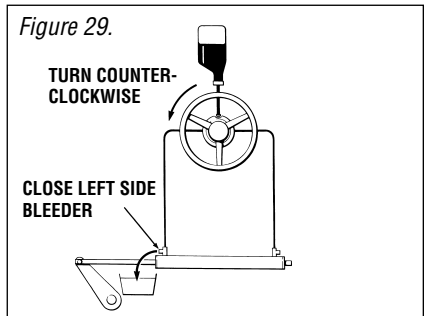

## Step 4

- Continue turning the steering wheel counter-clockwise until the cylinder rod is fully extended to the right. (Steering wheel will come to a stop.)
- Open the right bleeder.


Figure 30.

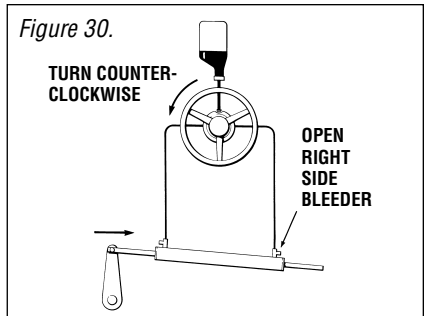

## Step 5

- Holding the cylinder rod (to prevent it from moving back into the cylinder) turn the steering wheel clockwise until a steady stream of air free oil comes out of bleeder.
- While continuing to turn the wheel, close the right side bleeder and let go of the cylinder rod.

Figure 31.

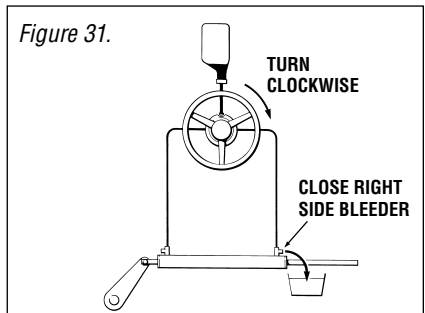

**Fill and purge is now complete.**

## HYDRAULIC STEERING

### FILLING AND PURGING

#### Oil Level Set

- Proper oil level set can be obtained by opening right bleeder and turning steering wheel to the right until fluid level reaches top of plastic filler fitting and then turning wheel one more full turn.

#### ⚠ CAUTION

For unbalanced cylinders the oil level in the helm must be set with the cylinder rod fully retracted. Failing to observe this caution will result in an oil spill at the helm.

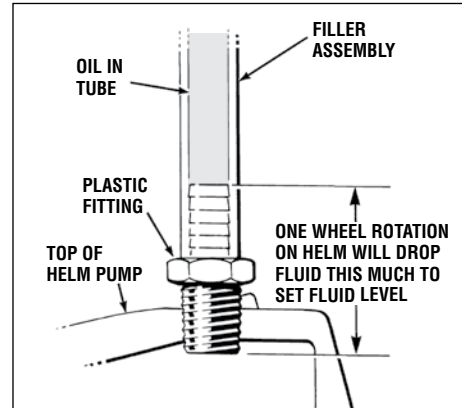


Figure 32.

#### Twin Station Single Cylinder

- Perform steps 1 through 5 at station no.1. Then repeat steps 1 – 5 at station no.2.
- Oil requirements 4 – 5 bottles.

**NOTICE** Refer to *Oil Level and System Check* on page 24.

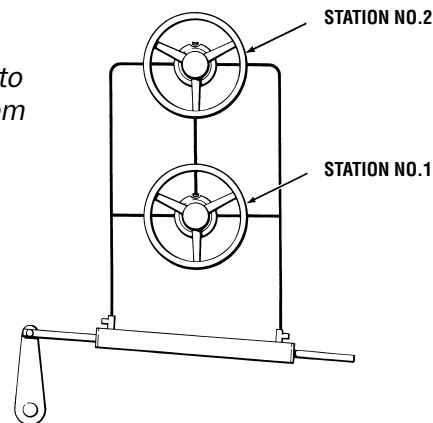


Figure 33.

#### Single Station Twin Cylinder

- When performing steps 1 through 5, perform instructions in each step first on cylinder no.1 and then on cylinder no.2, before proceeding to the next step. ie: Perform instructions referring to right side of cylinder first on cylinder no.1 and then on cylinder no.2.
- Oil requirements 4 – 5 bottles.

**NOTICE** Refer to *Oil Level and System Check* on page 24.

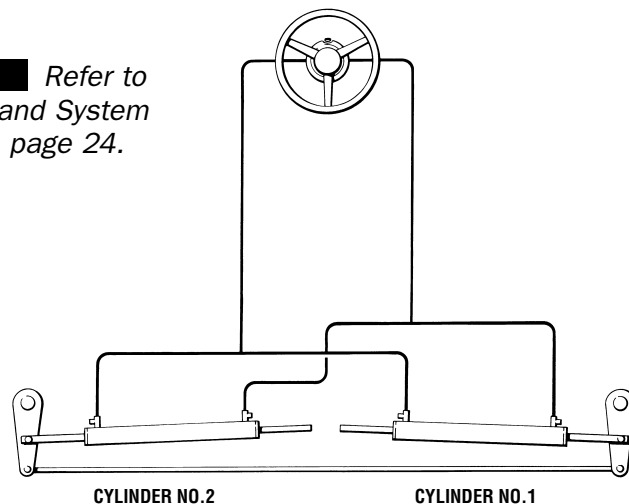


Figure 34 .

## Twin Station Twin Cylinder

- Follow same procedure as instructed for single-station/twin-cylinders, beginning at station no.1, and repeat entire procedure at station no.2.

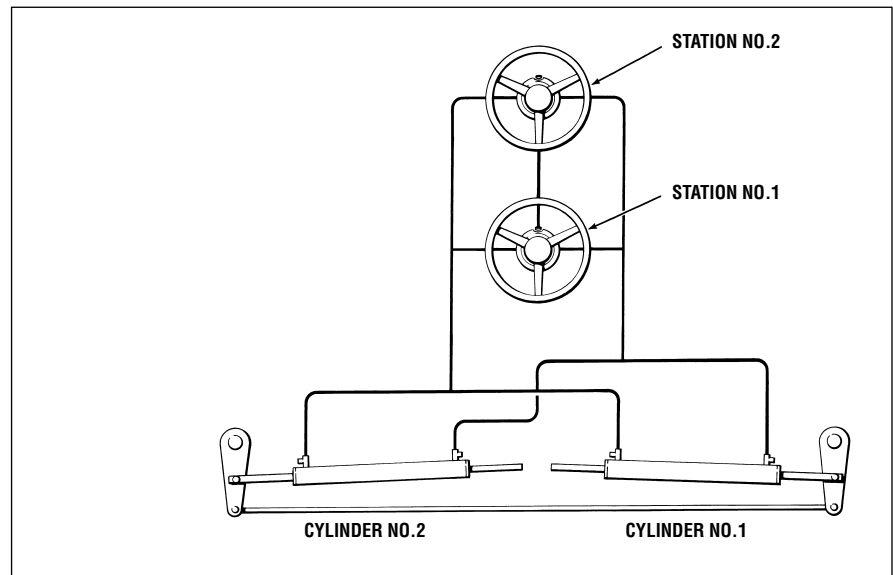


Figure 35.

# OIL LEVEL & SYSTEM CHECK

## STEP 1

### WARNING

### Oil Level Setting

The oil level **MUST** be checked and maintained **BEFORE** each use to ensure the safe operation of your steering system. Failure to adhere to this warning may lead to loss of steering control. Loss of steering control may result in unpredictable boat behavior, collision with an obstacle and/or ejection from vessel, leading to property damage personal injury and/or death.

### CAUTION

When setting fluid level in a system fitted with an unbalanced cylinder, the cylinder shaft **MUST** be fully retracted (IN). Failure to have cylinder shaft retracted (IN) will lead to very stiff steering and/or oil spillage at the helm pump.

- For helms mounted with the wheel shaft completely horizontal **MUST** be filled to the bottom of the filler hole **AT ALL TIMES**. **DO NOT** allow oil level to drop more than 1/4" below the filler port threads.
- For helms mounted on a 20° angle, or, with wheel shaft in the vertical position the oil level must be no lower than 1/2" below filler port threads and no higher than 1/8" below filler port threads.

## STEP 2

### WARNING

### System Check

The System Check **MUST** be completed after installation. Doing so will ensure the safe operation of your steering system. Any fault (leaks or malfunction) will present itself during this check. Failure to adhere to this check may result in loss of steering control. Loss of steering control may lead to unpredictable boat behavior, leading to a collision with an obstacle and/or ejection from the boat, resulting in property damage personal injury and/or death.

- Turn steering wheel hard over to hard over to confirm unrestricted movement of steering components.

### NOTICE

*If equipped with a tilting helm, repeat this step in "EVERY" tilt position.*

- Confirm that rudder(s) and outdrive(s) are turning to the proper direction.
- If no interference is noticed and rudder(s) and/or outdrive(s) are turning to the proper direction, go to next point
- Take steering wheel hard over to starboard. Once the wheel reaches its stop point, force the wheel another 1/4 – 1/2 turn past stop. Leave wheel in this position while you inspect ALL fittings, helms and hose/tubes for any signs of a leak.
- Repeat above step to the starboard side of each steering station
- Repeat above steps to the port side of each steering station.
- If ANY leaks are noticed they **MUST** be repaired **BEFORE** operating your boat.

### WARNING

Failure to correct **ANY** problem that becomes present during the "System Check" may lead to loss of steering control. Loss of steering control can lead to unpredictable boat behavior and/or collision with obstacle and/or ejection from vessel resulting in property and/or personal injury or death.

# ROUTINE MAINTENANCE

Following the routine maintenance schedules below, in the time frame noted, will ensure years of great service from your SeaStar Steering System, as well as keep you and your passengers safe from the dangers that are present on the water.

## NOTICE

*Maintenance requirements will vary depending on usage and climate. Bi-Annual inspection by a qualified marine mechanic is required.*

### **1 Every Trip, prior to engine start up or launch**

- Check Fluid level in uppermost helm pump .
- Hose/Tube. Ensure hose/tubing are in good condition and free of wear, kinks or any other signs of fatigue or damage. \*REPLACE IF DEEMED FAULTY.
- Turn steering wheel hard over to hard over to ensure rudder(s) and/or outdrive(s) are responding to input at the wheel. Repeat on ALL steering stations on board (including autopilots).

### **2 Every 100 hours or 3 months** (whichever comes first)

- All points noted in 1.
- Check torque value on ALL fasteners throughout the steering system. Tighten as required. See page 29 for torque specifications.

### **3 Every 6 months**

- All points noted in Steps 1 and 2.
- Grease rod end ball joints (inboard ATM and TM cylinders).
- Remove and clean support/cable tube (Sterndrive models).
- Remove steering wheel and re-grease wheel shaft.

## WARNING

**Failure to adhere to the “Routine Maintenance” procedures noted above may lead to loss of steering control. Loss of steering control may lead to unpredictable boat behavior and/or a collision with an obstacle and/or ejection from boat resulting in property damage, personal injury and/or death.**

# TROUBLESHOOTING GUIDE

SeaStar hydraulic steering will provide years of safe reliable performance with a minimum of service if properly installed with correct cylinder.

SeaStar steering systems have been designed with protection against over-pressure situations, by a pressure relief valve, to minimize the possibility of total loss of steering.

Most faults occur when the installation instructions are not followed and usually show up immediately upon filling the system. Provided below, are the most common faults encountered and their likely cause and solution. The term “Rudder” also applies to stern drives, when applicable.

Sometimes when returning the wheel from a hardover position, a slight resistance may be felt and a clicking noise may be heard. This should not be mistaken as a fault, as it is a completely normal situation caused by the releasing of the lockspool in the system.

## WARNING

**Whenever in the following text, a solution calls for removal from vessel and/or dismantling of steering system components, such work must only be carried out by a qualified marine hydraulic mechanic. Teleflex offers the following as a guide only and is not responsible for any consequences resulting from incorrect dismantling repairs.**

## FAULT

**1 During Filling, the helm becomes completely jammed.**

## CAUSE

- Blockage in the line between the helm(s) and the cylinder(s).

## SOLUTION

- Make certain that tubing has not collapsed during installation. If so, the collapsed section must be removed and re-fitted with a new piece with the aid of tube connectors. Check fittings for incomplete holes. Fittings with incomplete holes, however, are not common.

**2 System is very difficult to fill. Air keeps burping out top of helm even after system appears full.**

- Cylinder(s) has been mounted upside down. This causes air to be trapped in the cylinder(s).
- Air in system.

- Mount cylinder(s) correctly, according to cylinder installation instruction. Ports should always be kept in uppermost position.
- Review filling instructions.

**FAULT**

**3 Steering is stiff and hard to turn, even when the vessel is not moving.**

**CAUSE**

- Rudder post glands are too tight or rudder post is bent, causing mechanical binding. The same applies to tiller arm and linkage on outdrives.
- Restrictions in hose, copper tubing, piping or fittings.
- Air in oil.
- Wrong oil has been used to fill steering system, like A.T.F. (automatic transmission fluid, or any other oil with a high viscosity factor).
- Support tube corroded or seized restricting movement of hydraulic cylinder.

**SOLUTION**

- To test, disconnect cylinder(s) from the tiller arm and turn the steering wheel. If it turns easily, correct above mentioned problems. Please note that excessively loose connections to tiller arm or tie-bar can also cause mechanical binding.
- Find restriction and correct. **Note:** Collapsing of copper tubing during bending is enough to cause restrictions.
- See filling instructions supplied with helm units.
- Drain system and fill with recommended oils.
- Remove cylinder, clean and re-grease.

**4 One helm unit in system is very bumpy and requires too many turns from hardover to hardover.**

- Dirt in inlet check of helm pump.

- Contact Authorized repair center and/or replace helm pump.

**5 Steering is easy to turn at the dock, but becomes hard to turn when vessel is underway.**

- Steering wheel is too small.
- cylinder(s) too small.
- incorrect setting of trim tab(s) on stern drive.
- incorrectly designed or adjusted rudders, causing binding on rudder post and/ or tie bar at cruising speeds.

- Fit larger wheel if possible, see installation instructions. If the problem cannot be rectified by the above mentioned solution, proceed with next cause and solution or consult factory.
- replace with larger cylinder(s).
- adjust tab(s).
- seek professional help. Have competent, qualified marine mechanic correct problem.
- Fit system with SeaStar Power Assist. **NOTE:** *SeaStar Power Assist is not intended to compensate for a weak, or improperly installed steering cylinder.*

## HYDRAULIC STEERING

### TROUBLESHOOTING

---

#### FAULT

**6 Rudder drifts to port or starboard while vessel is underway, even when wheel is not being turned.**

#### CAUSE

- Dirt in check valves.

#### SOLUTION

- Contact authorized repair center and/or replace helm pump.

---

**7 Turning one wheel causes the second steering wheel to rotate.**

- See fault No. 6.

- See fault No. 6.

---

**8 Consistent wearing of rod end ball and or mounting foot.**

- Excess vibration at rudder.

- Consult with boat builder and/or Naval architect for vibration cure.

---

**9 Sterndrive system is hard to turn with engine off.**

- Engine driven power steering pump not operating.

- This is normal in a power steering application.

---

#### Teleflex Marine Technical Support Contacts:

Phone: 604-248-3858

Web: [www.teleflexmarine.com](http://www.teleflexmarine.com)

e-mail: [info@teleflex.bc.ca](mailto:info@teleflex.bc.ca)

Hours: 8am - 7pm EST



# TECHNICAL INFORMATION

## Bolt Torque Specifications

Values are stated in: **in/lbs (N.m)**

Bolt Size	18-8SS	Brass	Bolt Size	18-8SS	Brass	Bolt Size	18-8SS	Brass
2-56	2.5 (.282)	2.0 (.226)	6-32	9.6 (1.08)	4.9 (.554)	5/16"-18	132.0 (14.91)	107.0 (12.10)
2-64	3.0 (.338)	2.5 (.282)	6-40	12.0 (1.35)	9.9 (1.12)	5/16"-24	142.0 (16.04)	116.0 (13.11)
3-48	3.9 (.440)	3.2 (.361)	8-32	20.0 (2.25)	16.0 (1.81)	3/8"-16	236.0 (26.66)	192.0 (21.71)
3-56	4.4 (.497)	3.6 (.407)	8-36	22.0 (2.48)	18.0 (2.03)	3/8"-24	259.0 (29.20)	212.0 (23.97)
4-40	5.2 (.587)	4.3 (.486)	10-24	23.0 (2.59)	19.0 (2.14)			
4-48	6.6 (.740)	5.4 (.610)	10-32	32.0 (3.61)	26.0 (2.94)			
5-40	7.7 (.869)	6.3 (.712)	1/4"-20	75.0 (8.47)	62.0 (7.01)			
5-44	9.4 (1.06)	7.7 (.869)	1/4"-28	94.0 (10.6)	77.0 (8.70)			

Values are stated in: **ft/lbs (N.m)**

Bolt Size	18-8SS	Brass	Bolt Size	18-8SS	Brass	Bolt Size	18-8SS	Brass
7/16"-14	31.0 (42.00)	26.0 (35.25)	5/8"-11	93.0 (126.09)	76.0 (103.04)	1"-8	287.0 (389.12)	235.0 (318.62)
7/16"-20	33.0 (44.74)	27.0 (36.61)	5/8"-18	104.0 (141.00)	85.0 (115.24)	1"-14	259.0 (351.16)	212.0 (287.43)
1/2"-13	43.0 (58.30)	35.0 (47.45)	3/4"-10	128.0 (173.55)	104.0 (141.00)			
1/2"-20	45.0 (61.01)	37.0 (50.17)	3/4"-16	124.0 (168.12)	102.0 (138.29)			
9/16"-12	57.0 (77.28)	47.0 (63.72)	7/8"-9	194.0 (236.03)	159.0 (215.58)			
9/16"-18	63.0 (85.42)	51.0 (69.15)	7/8"-14	193.0 (261.67)	158.0 (214.22)			

## Helm Pump

SeaStar I  
SeaStar II

### DISPLACEMENT

1.7 cu. in. (27.8 cc)  
2.4 cu. in. (39.3 cc)

### RELIEF VALVE

1000 PSI (68 Bar)  
1000 PSI (68 Bar)

### PORTS

1/4" NPT  
1/4" NPT

## Helm Pump Shaft

SeaStar I  
SeaStar II

### TAPER

3/4" Standard, 1" per ft.  
3/4" Standard, 1" per ft.

### THREAD

5/8" NF  
5/8" NF

### KEY SIZE

3/16"  
3/16"

## Cylinder

		STROKE	VOLUME	TORQUE 1000psi-70 BAR-35°
HC5303-3	BA125-3ATM inboard type	3" (76 mm)	3.1 cu.in. (51 cc)	N/A
HC6324-3	BA150-3.5ATM inboard type	3.5" (89 mm)	5 cu.in. (82 cc)	N/A
HC5339-32	125-6.5EM sterndrive type	6.5" (165mm)	7.9 cu.in. (129 cc)	N/A
HC5312-3	BA125-7ATM, inboard type	7" (178 mm)	7.2 cu.in. (118.0 cc)	5024 in/lbs (58Kg)
HC5313-3	BA135-7ATM, inboard type	7" (178 mm)	8.2 cu.in. (134.4 cc)	5741 in/lbs (66Kg)
HC5314-3	BA150-7ATM, inboard type	7" (178 mm)	10.2 cu.in. (167.1 cc)	7117 in/lbs (82Kg)
HC5318	BA150-7TM, inboard type	7" (178 mm)	10.2 cu.in. (167.1 cc)	7117 in/lbs (82Kg)
HC5319	BA175-7TM, inboard type	7" (178 mm)	13.7 cu.in. (224.5 cc)	9569 in/lbs (110Kg)
HC5326-3	BA150-7EM, sterndrive type	7" (178 mm)	10.2 cu.in. (167.1 cc)	7117 in/lbs (82Kg)
HC5328-3	125-8EMV, sterndrive type	8" (203 mm)	8.5 cu.in. (139.2 cc)	5850 in/lbs (67Kg)
HC5329-3	125-8VPEM, sterndrive type	8" (203 mm)	8.5 cu.in. (139.2 cc)	5850 in/lbs (67Kg)
HC5330-3	BA125-8EMV, sterndrive type	8" (203 mm)	8.5 cu.in. (139.2 cc)	5850 in/lbs (67Kg)
HC5331-3	92VPS, sterndrive type	8" (203 mm)	8.5 cu.in. (139.2 cc)	N/A (N/A)
HC5332-3	BA135-7EM, sterndrive type	7" (178 mm)	8.2 cu.in. (134.4 cc)	5741 in/lbs (66Kg)
HC5369	BA150-9TM, inboard type	9" (229 mm)	13.1 cu.in. (214.7 cc)	9375 in/lbs (108Kg)
HC5373	BA175-9TM, inboard type	9" (229 mm)	17.7 cu.in. (290.1 cc)	12600 in/lbs (145Kg)

## Fittings


SeaStar cylinder and all other fittings are 3/8" compression type fittings. Threads are 9/16" x 24 extra fine. A brochure on all SeaStar fittings is available from Teleflex Canada.

## SeaStar I, II Hose

- SeaStar I, II hose inside diameter – 5/16" (8 mm).
- Other recommended hose is Aeroquip 2651 or equivalent. Inside diameter should not be smaller than 5/16"

# PARTS LIST

## HC5318 and HC5318CAT (BA150-7TM)

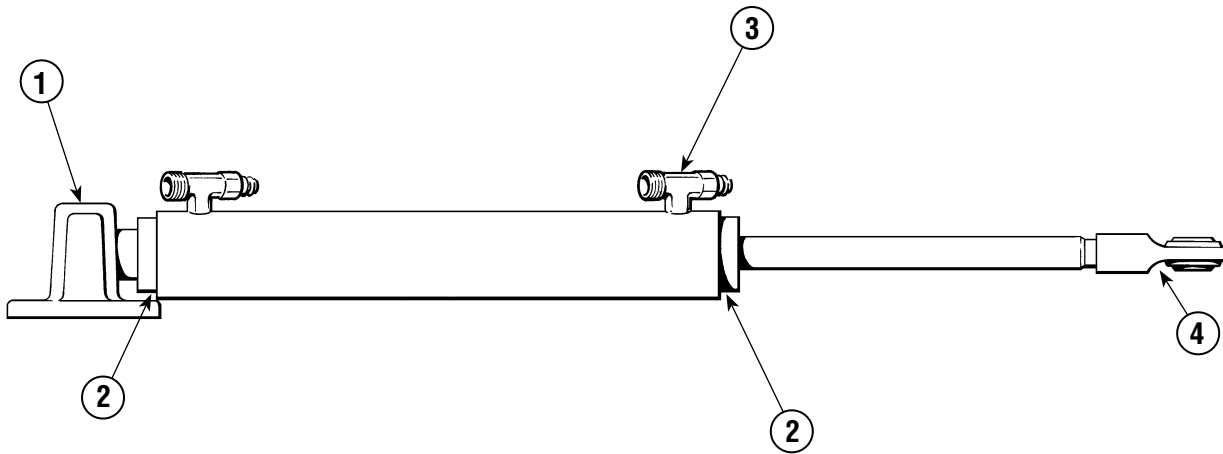

### NOTICE

Teleflex does not sell internal parts. Contact Authorized repair center for repair and/or replace cylinder.

### ⚠ WARNING

When replacing any seals, make sure shaft is clear of any abrasions.





Figure 36.

ITEM	PART #	QTY	DESCRIPTION
1	HP6068	1	Trunnion Assembly
2	HS5182	1	Seal Kit (does not include internal seals)
3	HF5518	1	Bleeder/Tee Assembly
4	HP6093	1	Rod End Ball for HC5318 and HC5318CAT
5	HP5615	1	Clevis Connection Kit

ITEM	PART #	QTY	DESCRIPTION

**HC5369 (BA150-9TM)**

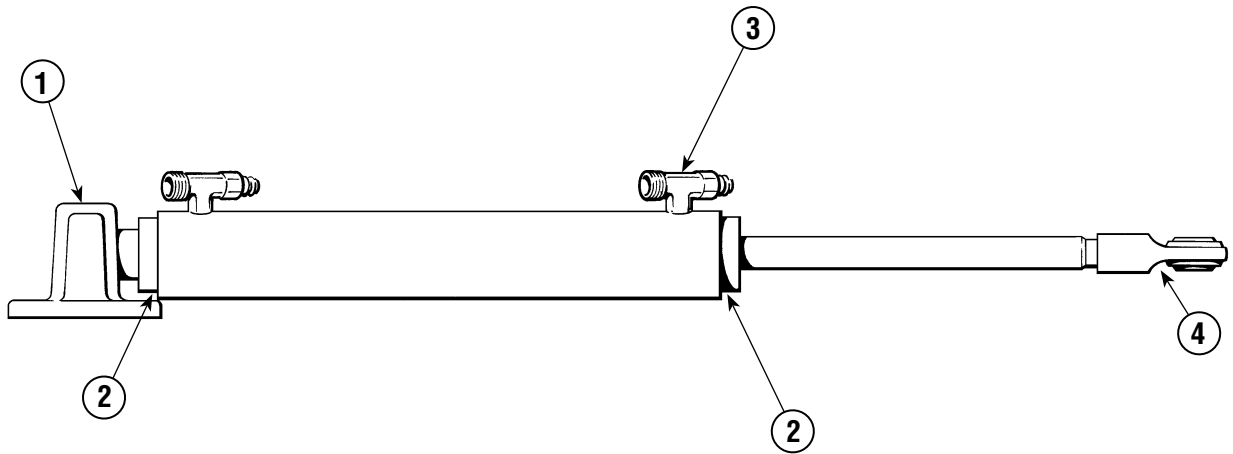

**NOTICE**

*Teleflex does not sell internal parts. Contact Authorized repair center for repair and/or replace cylinder.*

**⚠ WARNING**

**When replacing any seals, make sure shaft is clear of any abrasions.**




Figure 37.


ITEM	PART #	QTY	DESCRIPTION
1	HP6068	1	Trunnion Assembly
2	HS5182	1	Seal Kit <i>(does not include internal seals)</i>
3	HF5518	1	Bleeder/Tee Assembly
4	HP6093	1	Rod End Ball for HC5369
5	HP5615	1	Clevis Connection Kit

ITEM	PART #	QTY	DESCRIPTION
------	--------	-----	-------------

# HYDRAULIC STEERING

## PARTS LIST

### HC5319 and HC5319CAT (BA175-7TM)

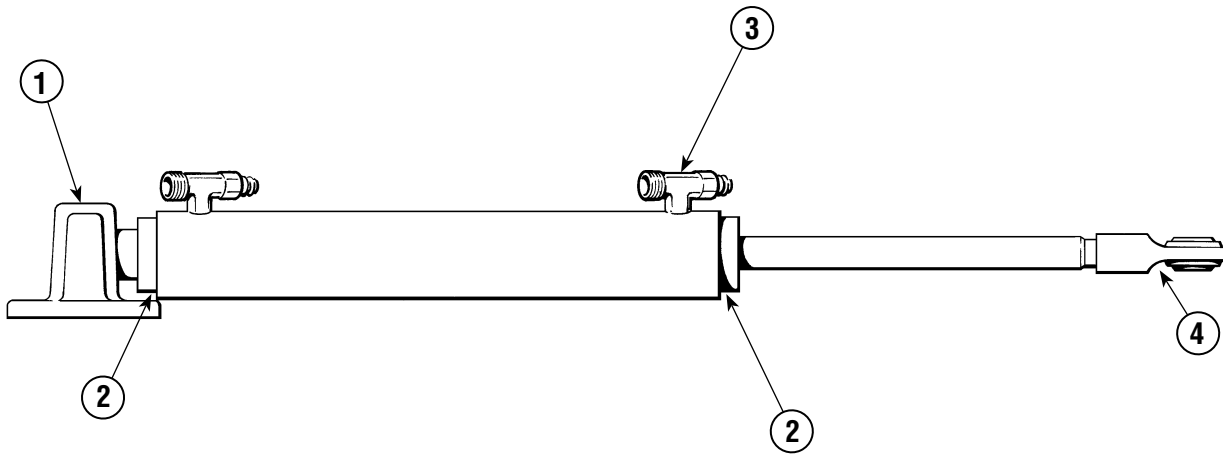

#### NOTICE

Teleflex does not sell internal parts. Contact Authorized repair center for repair and/or replace cylinder.

#### ⚠ WARNING

When replacing any seals, make sure shaft is clear of any abrasions.





Figure 38.

ITEM	PART #	QTY	DESCRIPTION
1	HP6068	1	Trunnion Assembly
2	HS5183	1	Seal Kit <i>(does not include internal seals)</i>
3	HF5518	1	Bleeder/Tee Assembly
4	HP6013	1	Rod End Ball for HC5319 and HC5319CAT
5	HP5615	1	Clevis Connection Kit

ITEM	PART #	QTY	DESCRIPTION

**HC5373 (BA175-9TM)**

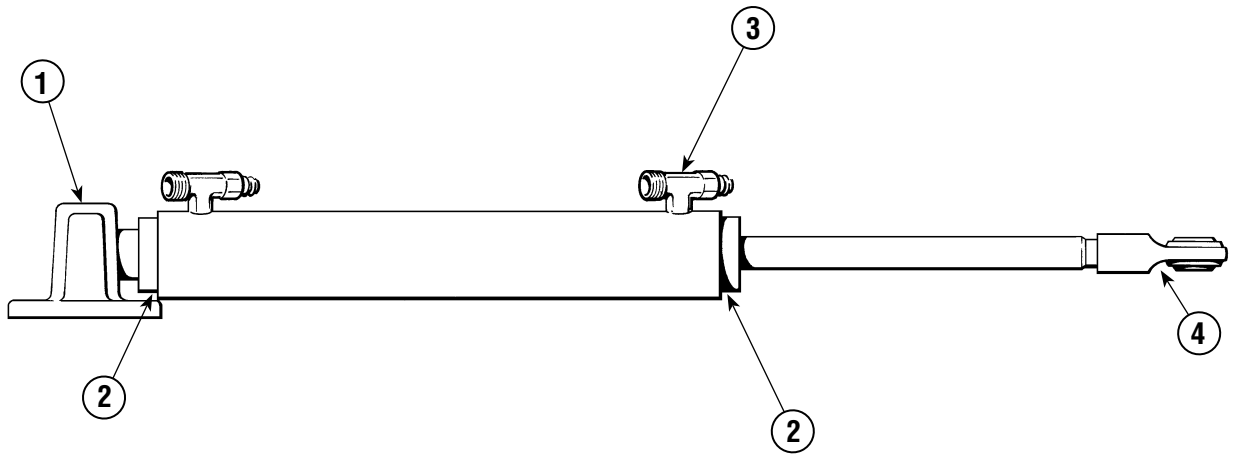

**NOTICE**

*Teleflex does not sell internal parts. Contact Authorized repair center for repair and/or replace cylinder.*

**⚠ WARNING**

**When replacing any seals, make sure shaft is clear of any abrasions.**




Figure 39.


ITEM	PART #	QTY	DESCRIPTION
1	HP6068	1	Trunnion Assembly
2	HS5183	1	Seal Kit <i>(does not include internal seals)</i>
3	HF5518	1	Bleeder/Tee Assembly
4	HP6013	1	Rod End Ball for HC5373T
5	HP5615	1	Clevis Connection Kit

ITEM	PART #	QTY	DESCRIPTION
------	--------	-----	-------------

# HYDRAULIC STEERING

## PARTS LIST

### HC5303-3 and HC5312-3

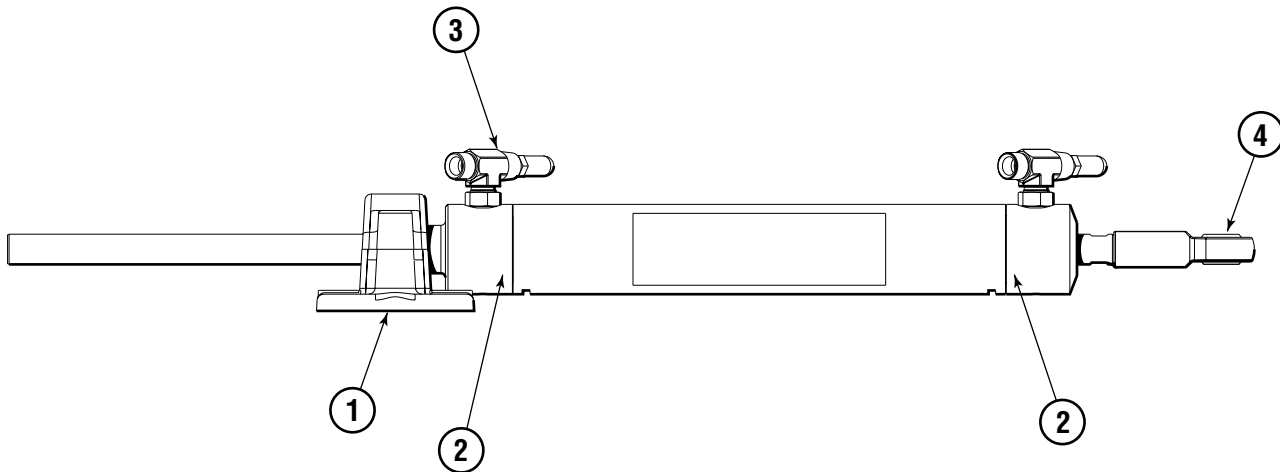

### NOTICE

Teleflex does not sell internal parts. Contact Authorized repair center for repair and/or replace cylinder.

### ⚠ WARNING


When replacing any seals, make sure shaft is clear of any abrasions.

Figure 40.

ITEM	PART #	QTY	DESCRIPTION
1	HP5611	1	Aluminum Mounting Foot
2	HP6026	1	End Gland
3	HF6001	1	Bleeder/Tee Assembly, Horizontal (2 per kit)
	HF6002	1	Bleeder/Tee Assembly, Vertical (2 per kit)
4	HP6013	1	Rod End Ball

ITEM	PART #	QTY	DESCRIPTION
------	--------	-----	-------------

**HC5328-3, HC5329-3 and HC5330-3**

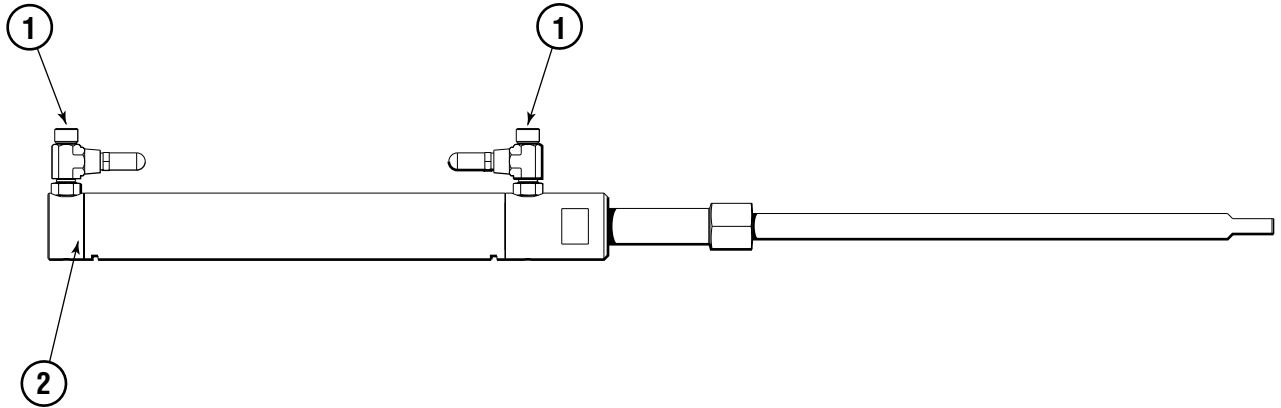

**NOTICE**

*Teleflex does not sell internal parts. Contact Authorized repair center for repair and/or replace cylinder.*

**⚠ WARNING**

**When replacing any seals, make sure shaft is clear of any abrasions.**

Figure 41.


ITEM	PART #	QTY	DESCRIPTION
1	HF6001	1	Bleeder/Tee Assembly, Horizontal <i>(2 per kit)</i>
	HF6002	1	Bleeder/Tee Assembly, Vertical <i>(2 per kit)</i>
2	HP6027	1	End Gland Seal Kit

ITEM	PART #	QTY	DESCRIPTION

# HYDRAULIC STEERING

## PARTS LIST

### HC5326-3

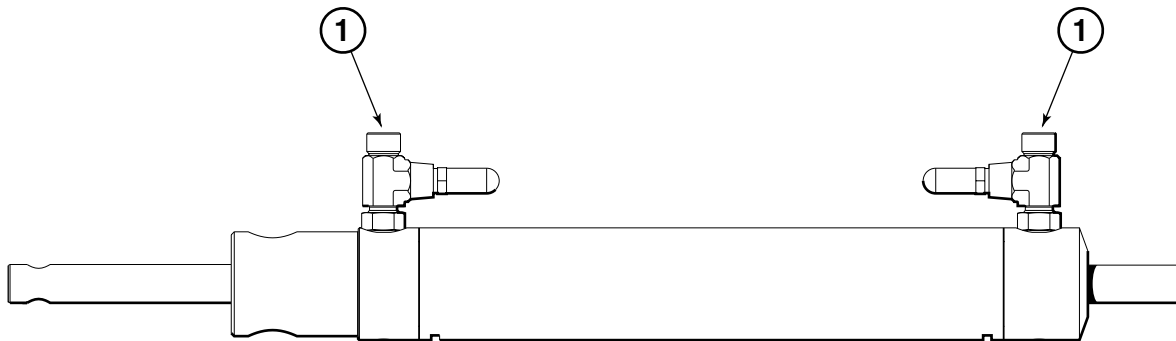

### NOTICE

*Teleflex does not sell internal parts. Contact Authorized repair center for repair and/or replace cylinder.*

### WARNING

**When replacing any seals, make sure shaft is clear of any abrasions.**


Figure 42.

ITEM	PART #	QTY	DESCRIPTION
1	HF6001	1	Bleeder/Tee Assembly, Horizontal (2 per kit)
	HF6002	1	Bleeder/Tee Assembly, Vertical (2 per kit)

ITEM	PART #	QTY	DESCRIPTION
------	--------	-----	-------------



**HC5303-3, HC5313-3, HC5314-3 and HC5324-3**

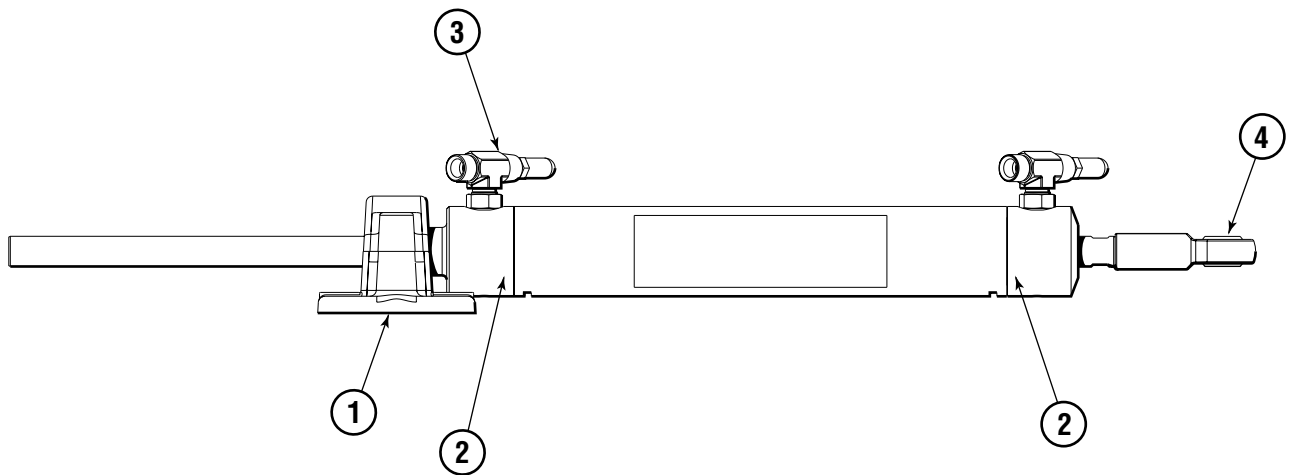

**NOTICE**

*Teleflex does not sell internal parts. Contact Authorized repair center for repair and/or replace cylinder.*

**⚠ WARNING**

**When replacing any seals, make sure shaft is clear of any abrasions.**

Figure 43.


ITEM	PART #	QTY	DESCRIPTION
1	HP5611	1	Aluminum Mounting Foot
2	HP6025	1	End Gland Seal Kit
3	HF6001	1	Bleeder/Tee Assembly, Horizontal (2 per kit)
	HF6002	1	Bleeder/Tee Assembly, Vertical (2 per kit)
4	HP6077	1	Rod End Ball

ITEM	PART #	QTY	DESCRIPTION
------	--------	-----	-------------

# HYDRAULIC STEERING

## PARTS LIST

### HC5331

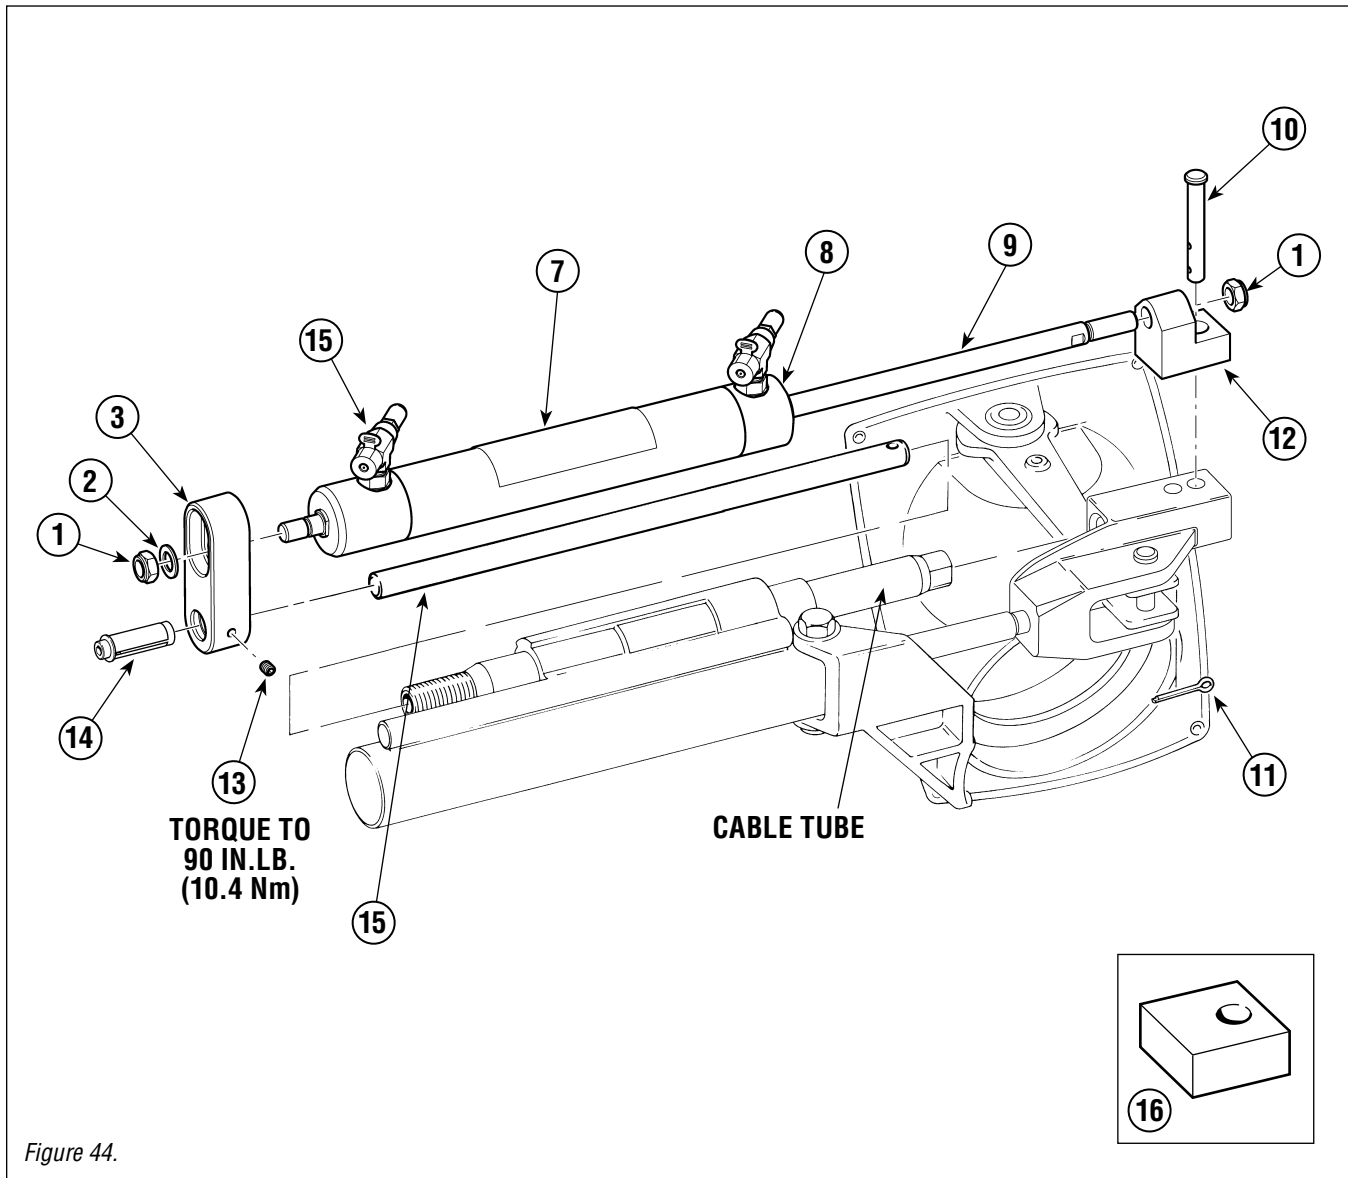

ITEM	PART #	QTY	DESCRIPTION
*1	731720	2	Nut 7/16" NF
*2	731625	1	Washer 7/16"
*3	343051	1	Support Bracket
*4	343057	1	Mounting Stud
*5	343120	1	Stud Gland
6	HF6002	2	Hose/Bleed Fitting (2 per kit)
*7	343608	1	Barrel
8	343150	1	End Gland
9	343424	1	Piston Shaft

ITEM	PART #	QTY	DESCRIPTION
*10	562923	1	Clevis Pin
*11	020926	1	Cotter Pin
*12	343052	1	Clevis Block
*13	790625	1	Set Screw, 1/4"
14	HP6092	1	Tube Support
*15	321446	1	Support Rod
*16	963721	1	Clevis Block

\*Replacement parts cannot be ordered by individual part number. Contact Teleflex Marine for kits that included these items.

# 2 YEAR LIMITED WARRANTY

We warrant to the original retail purchaser that Teleflex Canada Limited Partnership products have been manufactured free from defects in materials and workmanship. This warranty is effective for two years from the date of original retail purchase, excepting that where Teleflex Canada Limited Partnership products are used commercially or in any rental or other income producing activity, then this warranty is limited to 1 year from the date of original purchase.

We will provide replacement product without charge, for any Teleflex Canada Limited Partnership product not meeting this warranty, which is returned (freight prepaid) within the warranty period to the dealer from whom such products were purchased, or to us at the appropriate address. In any such case Teleflex Canada Limited Partnership products found to be defective and covered by this warranty, will be replaced or repaired at Teleflex Canada Limited Partnership's option, and returned to the customer.

Teleflex Canada Limited Partnership's sole responsibility under this warranty is limited to the repair or replacement of product which is, in Teleflex Canada Limited Partnership's opinion, defective. Teleflex Canada Limited Partnership is not responsible for charges connected with the removal of such product or re-installation of replacement or repaired parts.

We will have no obligations under this warranty for any product:

- Which has been improperly installed.
- Which has been used in an installation other than as recommended in our installation or operation instructions or specifications.
- Which has failed or has been damaged due to an accident or abnormal operation including racing, misuse or alterations outside our factory.
- Which has been repaired or modified by other than Teleflex Canada Limited Partnership.
- Which has been used on an engine/boat combination where the engine horsepower exceeds the boat horsepower rating established by the boat manufacturer.
- Which has been used with other products which, in Teleflex Canada Limited Partnership's opinion, are incompatible with the Teleflex Canada Limited Partnership product.

Please address the returned goods as follows:

**From U.S.A.**

RGA # ?

Teleflex Canada Limited  
Partnership c/o  
UPS Supply Chain Solutions, Inc.  
1201 C Street NW  
Auburn, WA, 98001

**From Canada**

RGA # ?

Teleflex Canada  
3831 No.6 Road  
Richmond, B.C.  
Canada V6V 1P6

THIS WARRANTY IS EXPRESSLY IN LIEU OF ANY OTHER WARRANTIES, OBLIGATIONS OR LIABILITIES ON THE PART OF TELEFLEX CANADA LIMITED PARTNERSHIP AND WILL BE THE CUSTOMER'S EXCLUSIVE REMEDY EXCEPT FOR ANY APPLICABLE IMPLIED WARRANTIES UNDER STATE LAW WHICH ARE HEREBY LIMITED IN DURATION TO TWO YEARS FROM THE DATE OF ORIGINAL PURCHASE. IN NO EVENT WILL TELEFLEX CANADA LIMITED PARTNERSHIP BE LIABLE FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES FOR BREACH OF ANY EXPRESS OR IMPLIED WARRANTY RELATING TO THE PRODUCTS.

Some states do not allow limitations on an implied warranty, or the exclusion of incidental or consequential damages, so the above exclusions may not apply to you. You may have other rights which vary from state to state.

If Teleflex Canada Limited Partnership products are to be returned to Teleflex Canada Limited Partnership under warranty, you must obtain a Return Goods authorization number (claim number) prior to shipping. Be sure to label the goods with:

- a) the name and address of the sender, and
- b) the return goods authorization number (claim number).

# Teleflex®

**MARINE**

TELEFLEX CANADA  
3831 NO.6 ROAD  
RICHMOND, B.C.  
CANADA V6V 1P6

FAX 604-270-7172

**[www.seastarsteering.com](http://www.seastarsteering.com)**

**ISO 10592**



© 2009 TELEFLEX CANADA LIMITED PARTNERSHIP

PRINTED IN CANADA

FORM NO. 343319 02/10 REV. D